



📱📞💬  
+86-191 2822 1262

✉️  
info@otterdtf.com

🌐  
www.otterdtf.com



VERSION: CTG-DTF2026-01

# OtterPro

## OTTER HEAT PRESSES & DTF PRINTING SOLUTIONS


Print, Cure, Wow  
with Otter DTF System!

DTF / UV DTF / 3D UV DTF  
Printing Solutions

Ink / Film / Powder / Cleaning Solution

Oven Dryer / Shaker / Heat Presses

[www.otterdtf.com](http://www.otterdtf.com)

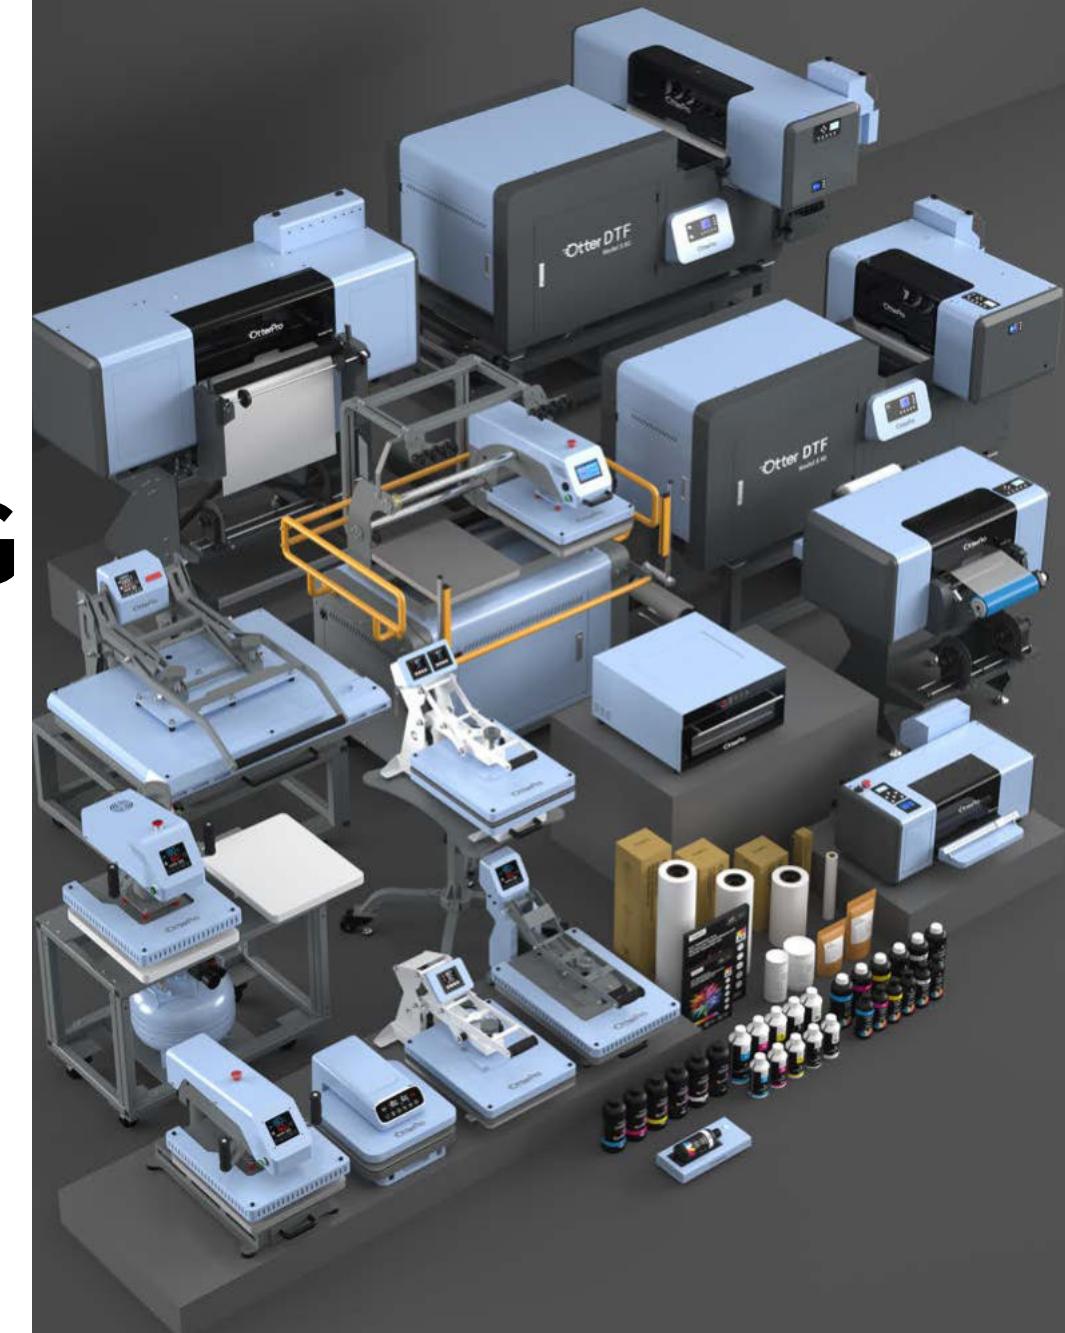



Elevate your business with OtterPro's advanced DTF printing system solutions, including DTF printers, UV DTF printers, 3D UV DTF printer and more. Our tailor-made "Start to Finish" approach empowers makers, retailers, and manufacturers to enhance efficiency and innovation.

With cutting-edge technology, exceptional quality, and a focus on environmental sustainability, we're committed to boosting your productivity and competitiveness. Partner with OtterPro and transform your business into a beacon of success and efficiency.




## Local Services

To ensure prompt and seamless support for OtterPro DTF printer users worldwide, we've established multiple OtterPro DTF Printer local service stations across the United States, Mexico, Panama, Europe and Thailand. Our comprehensive one-stop service center covers everything from purchasing and installing DTF printers to after-sales support, training, maintenance, repairs, and more. And we're still working on establishing OtterPro DTF service stations globally.

Besides the local service stations, you can also find OtterPro DTF products in Canada, Saudi Arabia, Dubai, and other South American countries. If you need further assistance, please feel free to contact us!




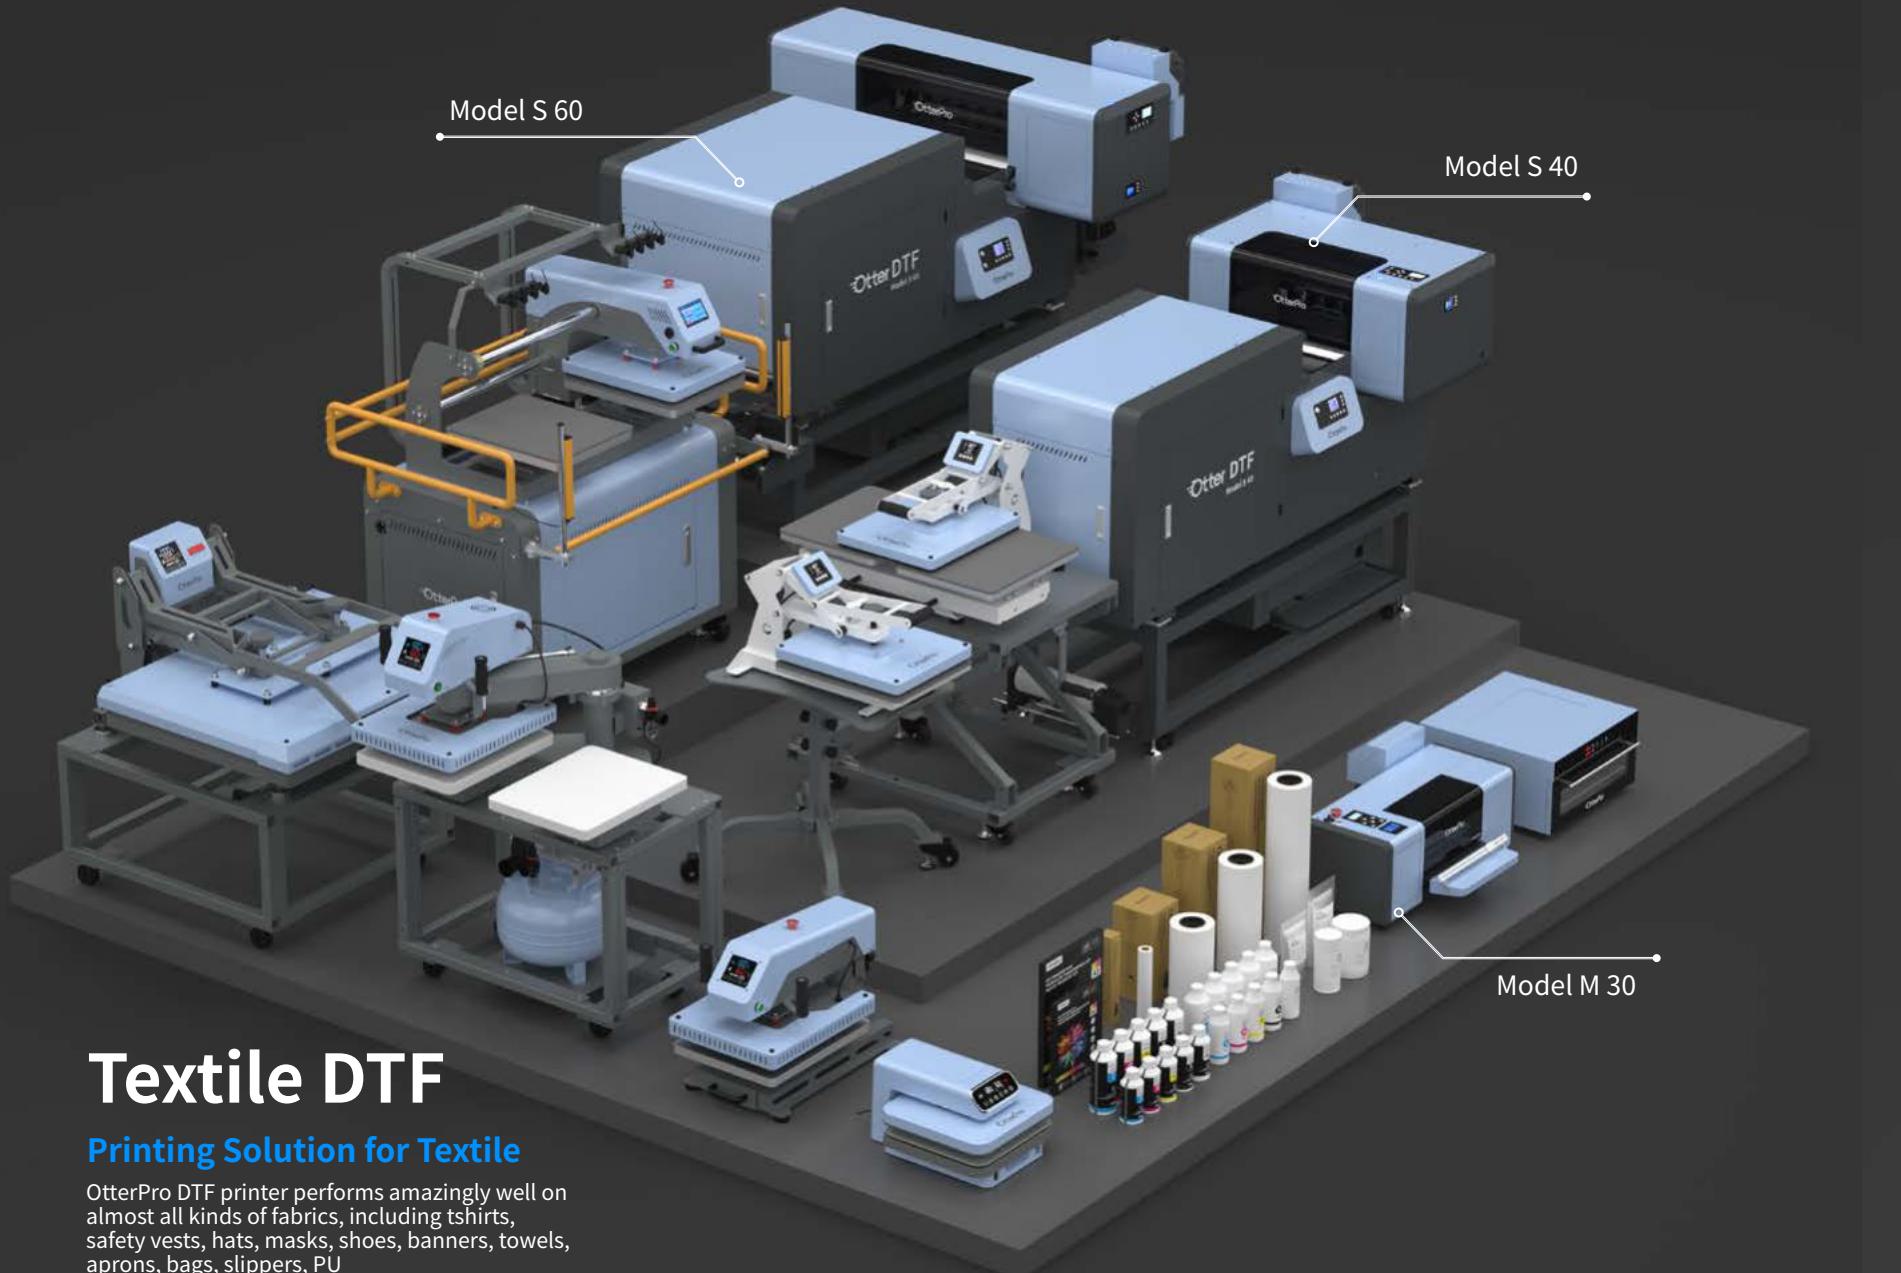

## Textile DTF

### Printing Solution for Textile

OtterPro DTF printer performs amazingly well on almost all kinds of fabrics, including tshirts, safety vests, hats, masks, shoes, banners, towels, aprons, bags, slippers, PU notebooks, coasters and more.


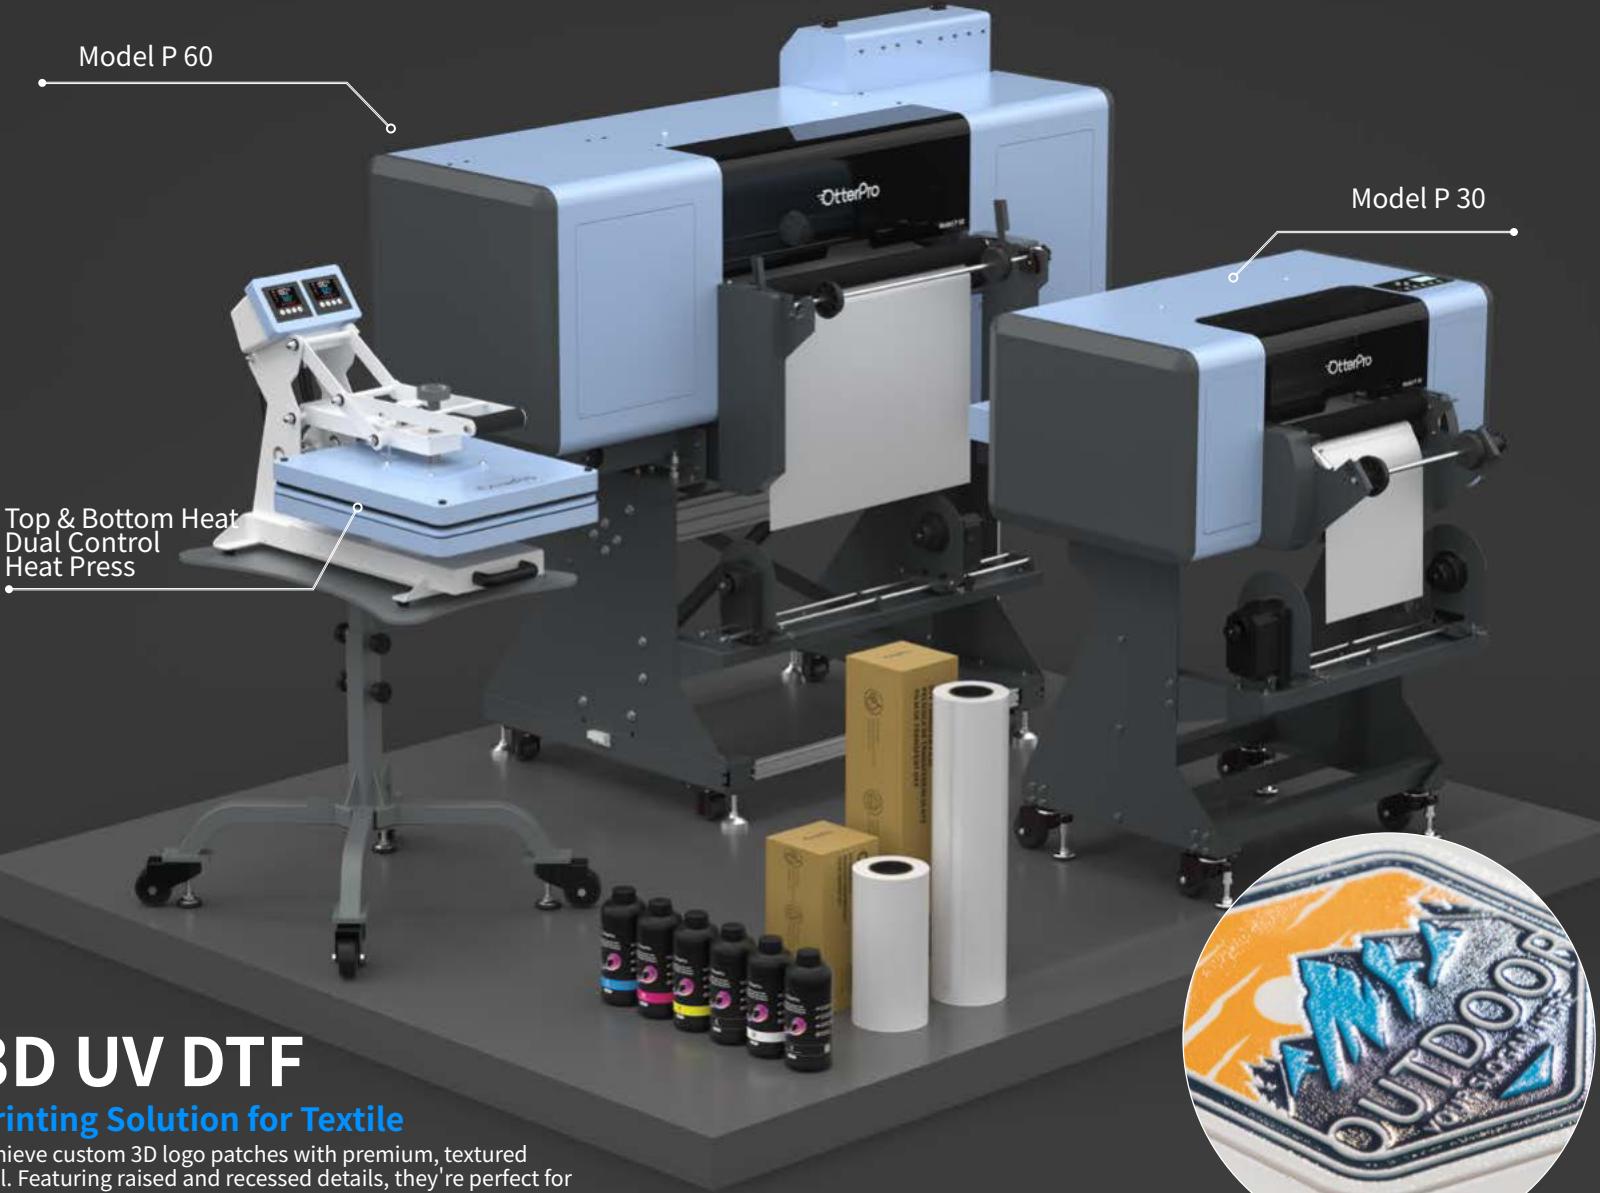


## 3D UV DTF

### Printing Solution for Textile

Achieve custom 3D logo patches with premium, textured feel. Featuring raised and recessed details, they're perfect for customizing sportswear, team jerseys, caps, bags, and more.



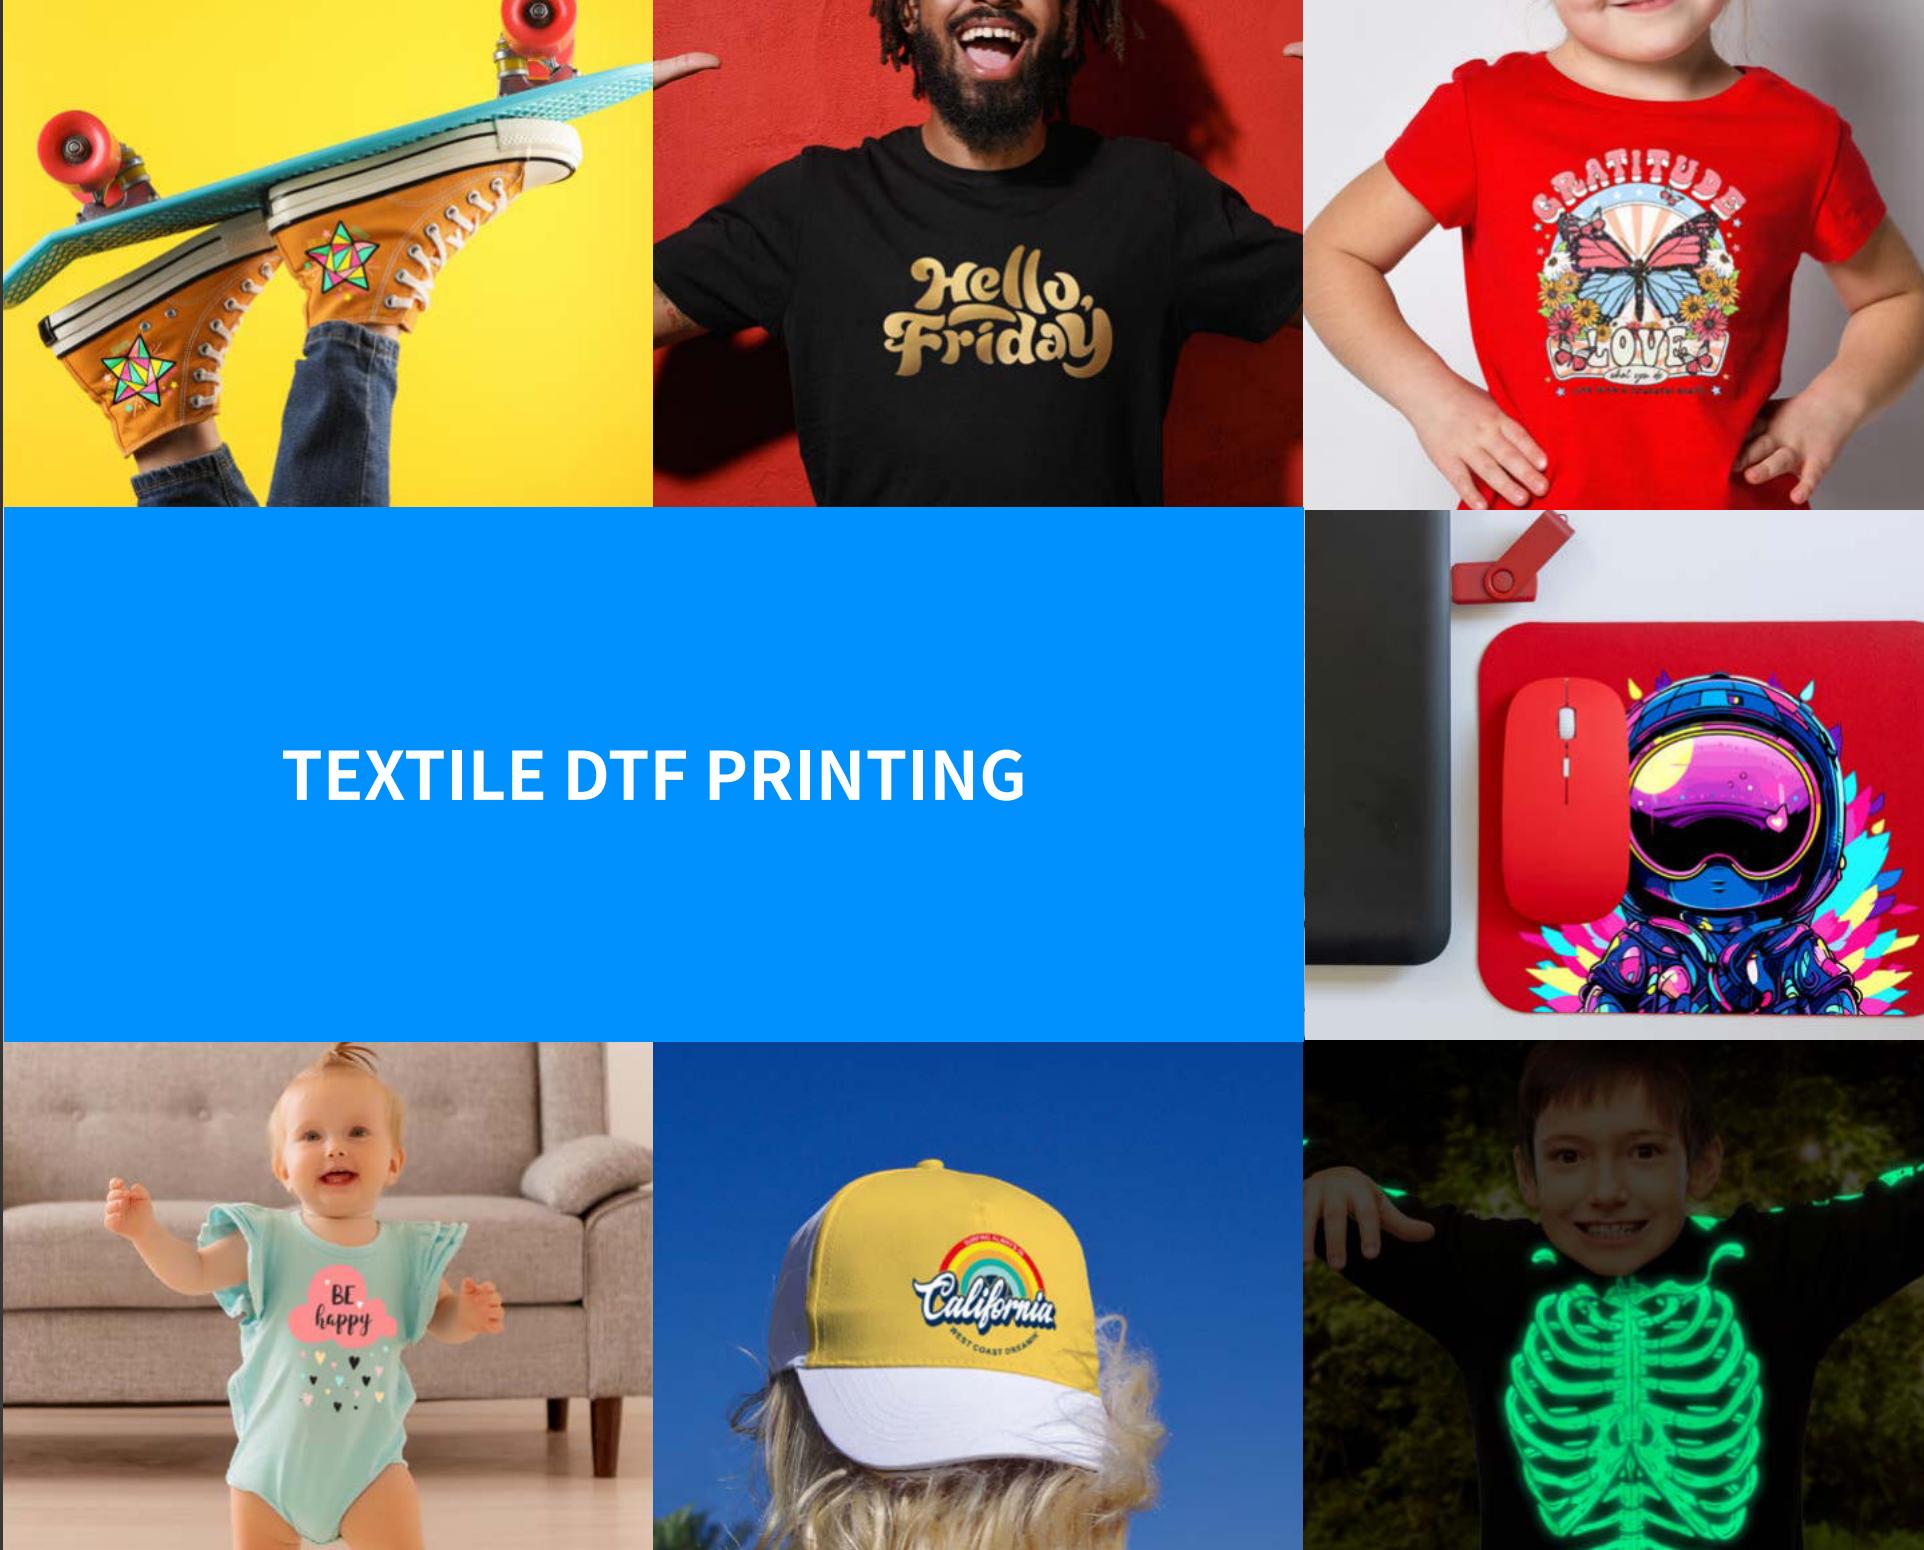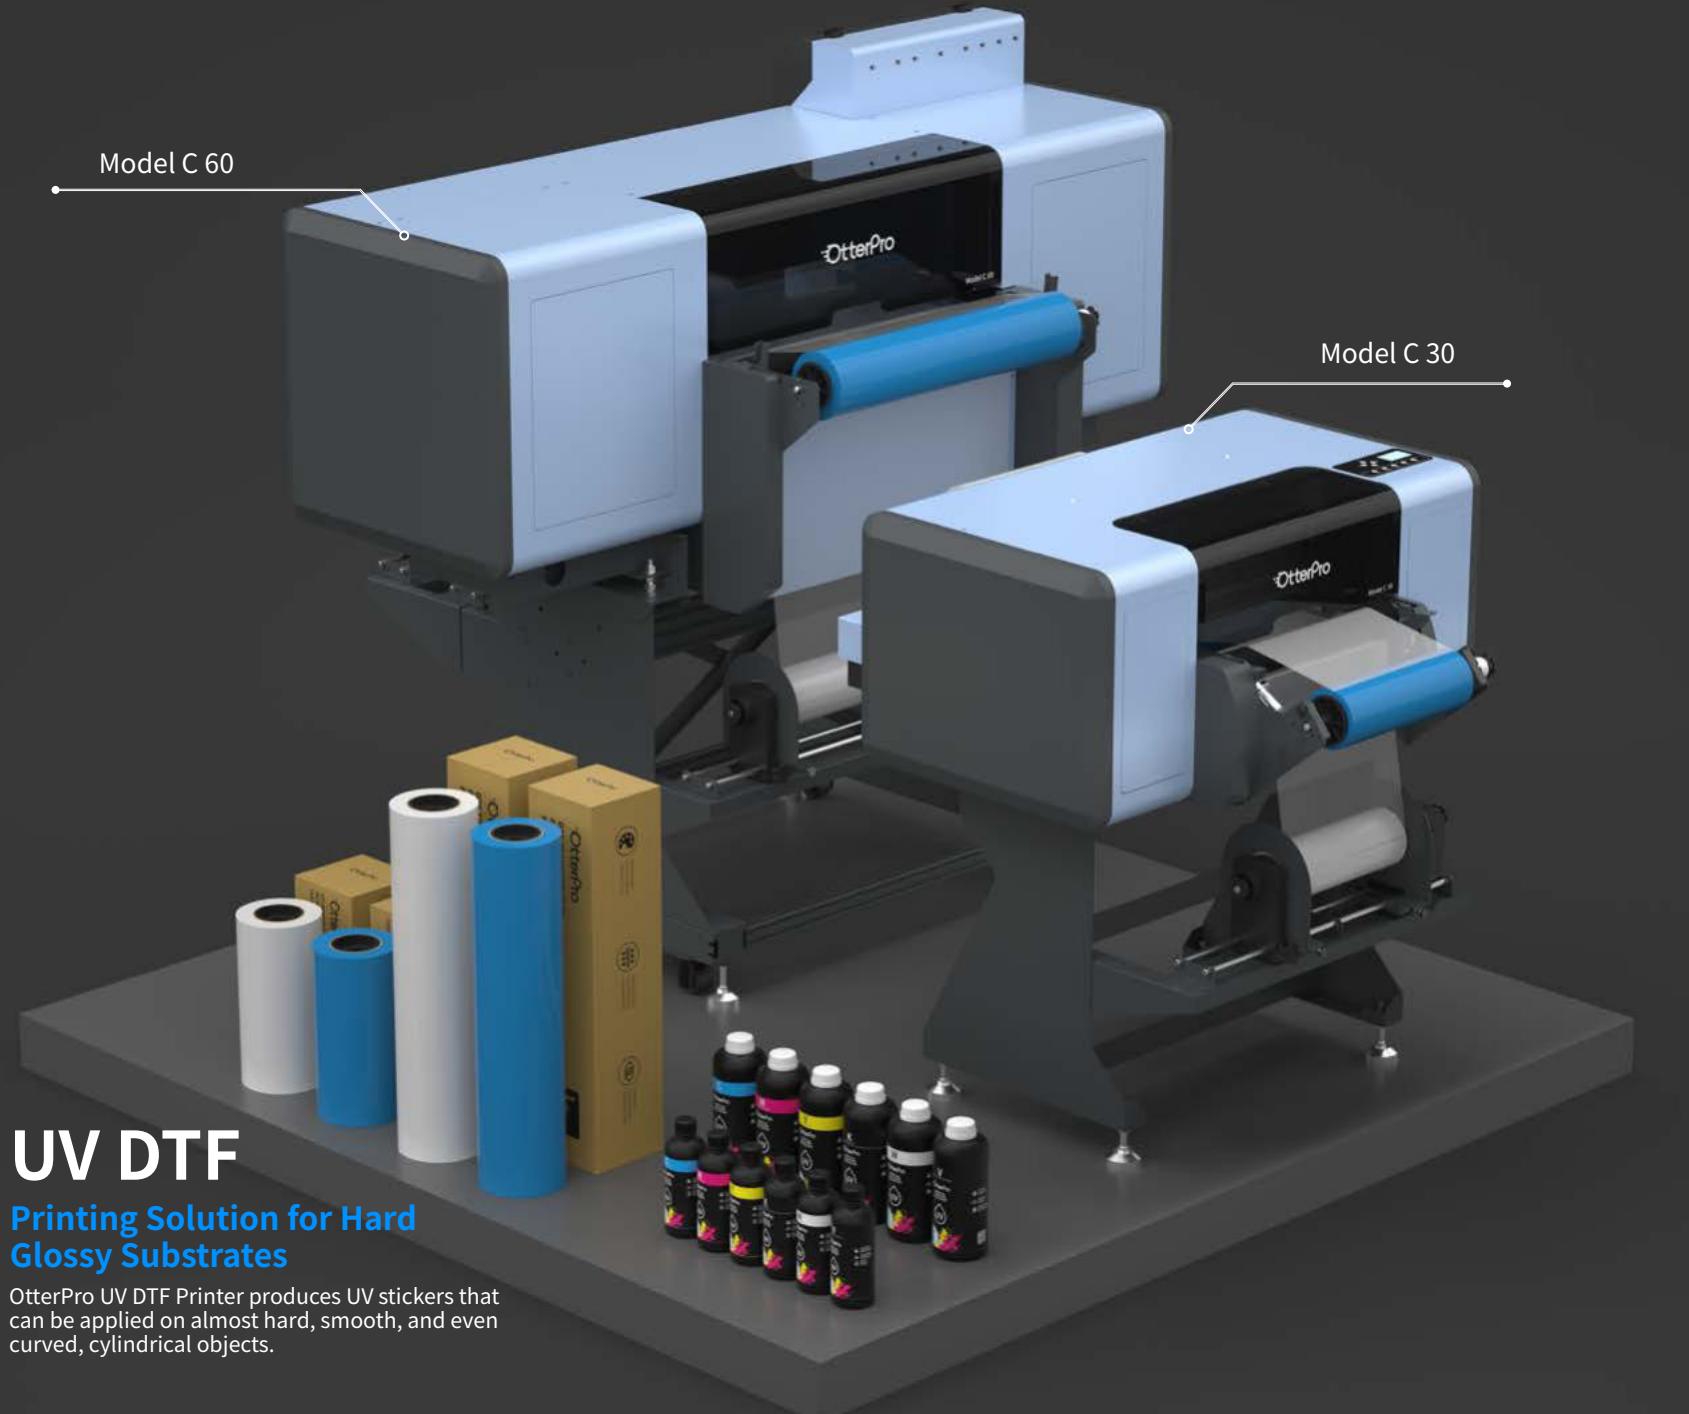




# Model P 60 3D UV DTF Printer

Model P 60 is an industrial-level 3D 3D UV DTF printer with a maximum print width of 60cm (23.6 inches). Equipped with 3 i1600-E1 printheads, specifically designed for industrial-grade printing, it delivers exceptional performance for handling larger sizes and high-volume 3D logo patch printing tasks.



**i1600-E1  
3 PCS**



**Print Width**

0-620 mm / 0-24.4 in MAX



**Auto System**

White ink stirring  
Suction system  
Automatic cleaning  
Adjustable heating rollers



**Alert System**

Low ink alerts  
Film-out detection



Model No.	<b>MODEL P60LB</b>	Nozzle Resolution	300dpi 600dpi
Printhead	i1600 E1 x3	Print Speed	960*900dpi (6pass) 960*1200dpi (8pass) Print Speed: 3.5-5.0m <sup>2</sup> /h Print Speed: 2.5-3.5m <sup>2</sup> /h
Voltage	110V/220V±10% 50-60Hz	Print Mode	Uni-direction / Bi-direction
Power	330W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Auto white ink stirring
Printer Software	OtterPro P 60 UV DTF	Printhead Maintenance	Automatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV DTF Ink	Inspection System	Low ink alerts / Film-out detection
Ink Color	H1: W+W+W+W H2: W+W+W+W H3: K+C+M+Y	System Requirements	Window 7 or above (macOS system is not supported)
Printing Method	A complete white ink, color, varnish hierarchical order printing	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.011 in	Printer Specification	170 x 107 x 154 cm / 66.9 x 42.1 x 60.6 in 280kg / 617lb
Print Width	0-620 mm / 0-24.4 in	Package Dimension	148 x 220 x 110 cm / 58.2 x 86.6 x 43.3 in 350kg / 771lb

**NOTE:**

The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.




### 3D Relief Effect

Combine 3D UV DTF ink to effortlessly create raised, tactile designs on fabric with a soft, textured finish.




### Mute Guide Rail

Mute Guide Rail Equipped with industry-leading guide rails, this printer ensures high precision and stable performance with minimal noise.

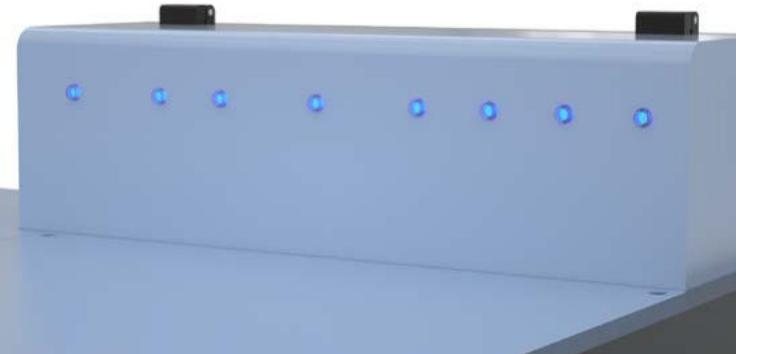

### Smart Auto System

Features automatic cleaning, self-maintenance, low ink alerts, and film-out detection.

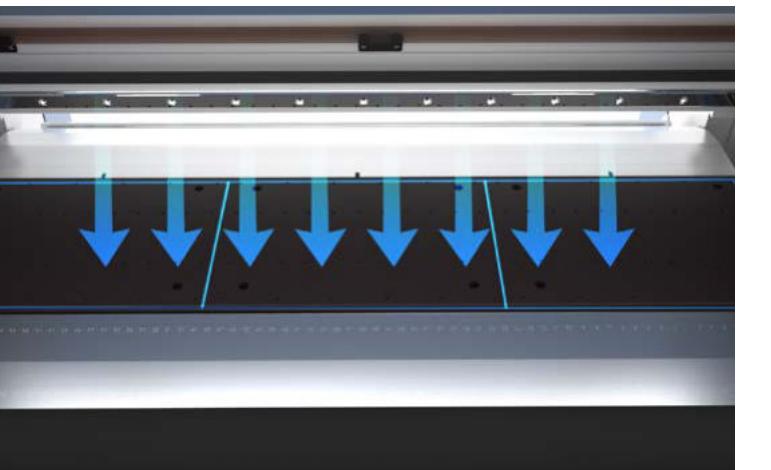


### Three-stage Vacuum Suction Platform

The 3-stage adjustable vacuum suction platform holds films securely in place, ensuring smooth, flawless printing every time, while also preventing printhead scratches from film contact.



### Adjustable Heating Rollers

Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.

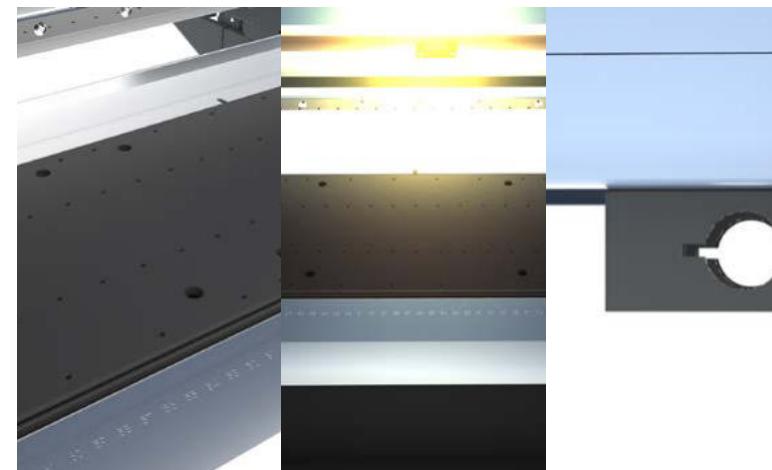


### Premium Construction Features

Corrosion-resistant treated surface and print platform for enhanced durability; integrated LED lights for illumination; the base frame features designed cutouts for convenient machine relocation.



### Leadshine Stepper Motor

The advanced industrial-quality motor ensures smooth, precise and stable motion for your projects.

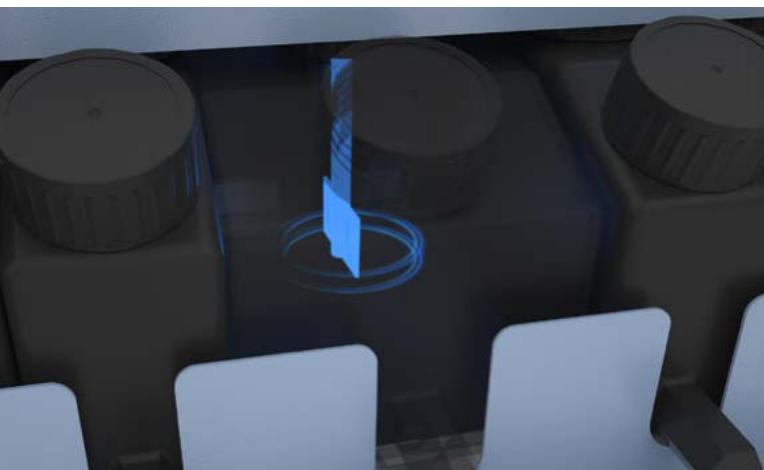

### Adjustable White Ink Auto Stirring


Prevent white ink precipitation, minimize clogging risks, and extend the lifespan of your UV DTF printer.

# Model P 30 3D UV DTF Printer

The Model P 30 is a compact 3D UV DTF printer with a 30cm (11.8 inches) maximum print width. Featuring i3200-U1 printheads, it delivers custom 3D logo patches with premium, textured feel.



## i3200-U1 HD 1 PCS



## Print Width

0-300mm/11.8in Max



## Auto System

White ink circulation system  
Suction system  
Automatic cleaning  
Adjustable heating rollers



## Alert System

Low ink alerts  
Waste ink alerts

Model No.	MODEL P 30 LB	Nozzle Resolution	300dpi 600dpi
Printhead	i3200-U1 HD x1 (8 Colors)	Print Speed	960*600dpi (4pass) Print Speed: 1.54m <sup>2</sup> /h 960*900dpi (6pass) Print Speed: 1.04m <sup>2</sup> /h 960*1200dpi (8pass) Print Speed: 0.74m <sup>2</sup> /h
Voltage	110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Power	410W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Auto white ink circulation system
Printer Software	OtterPro P 30 UV DTF	Printhead Maintenance	Automatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV DTF Ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	K+C+M+Y+W+W+W+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Printing Method	A complete white ink, color, varnish hierarchical order printing	Printer Specification (Base frame not included)	96 x 98 x 45 cm / 37.7 x 38.5 x 17.7 in 75kg / 165lb
Print Width	0-300 mm / 0-11.8 in	Package Dimension	112 x 112 x 63 cm / 44 x 44 x 24.8 in 95kg / 209lb

### NOTE:

The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.




### 3D Relief Effect

Combine 3D PUFF UV DTF ink to effortlessly create raised, tactile designs on fabric with a soft, textured finish.



### High Resolution

Compatible with i3200 U1 printhead with 600 dpi high-density resolution, ensures high color reproduction and high-quality prints.

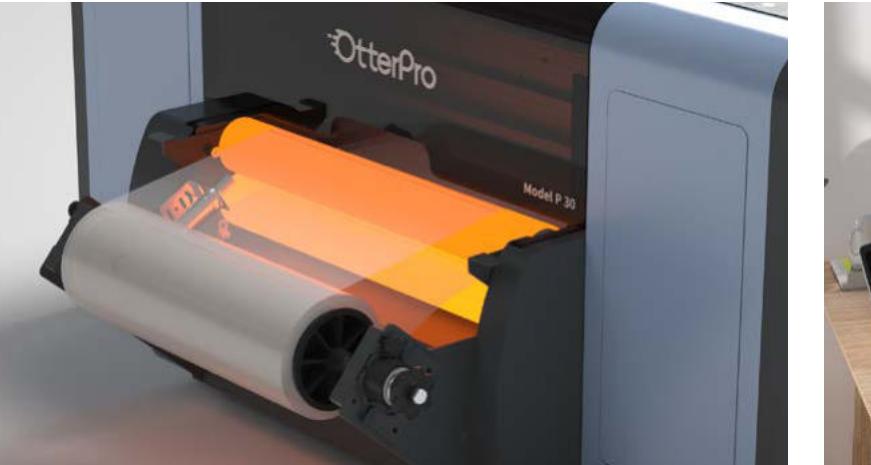


### Adjustable Heating Rollers

Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.



### Compact & Desktop

Compact desktop design, no extra stand required, ideal for small batch production at home or workshop.

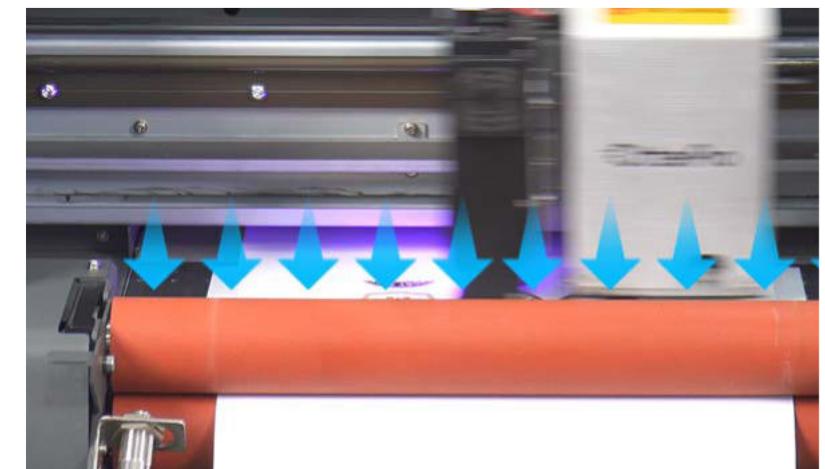

### Adjustable Vacuum Suction Platform

With an adjustable vacuum suction platform, the film adheres firmly to the platform, ensuring a smooth printing process.




### Built-in UV LED Lights

The built-in ultraviolet lights enable simultaneous printing and curing, and are ready for lamination!



### Auto White Ink Circulation

Equipped with two peristaltic pumps, this system keeps the ink in constant motion, reducing the risk of white ink clogging and extending the service life of your UV DTF printer.

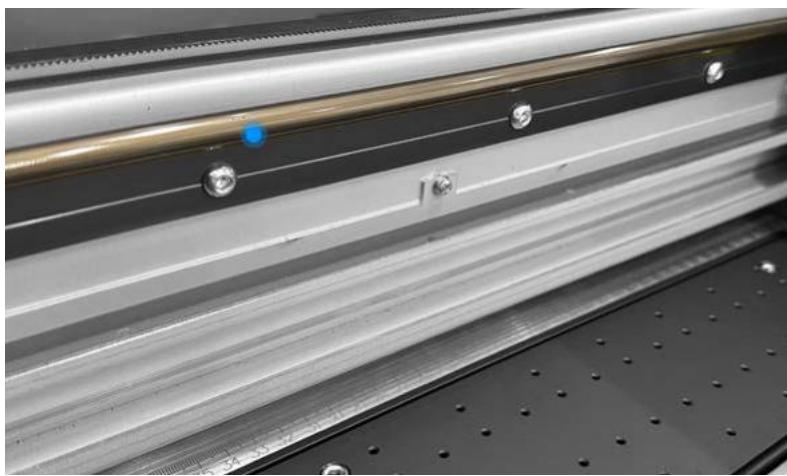

### Mute Guide Rail

The upgraded guide rail ensures high precision and stable performance with minimal noise.



## 3D UV DTF PRINTING

## 3D UV DTF Film

The TPU-based 3D UV DTF film is perfect for printing 3D raised texture. The printed film is soft and stretchable, making it the perfect choice for soft fabrics.



P303D-5H3033W  
Size: 0.3x33.33M

P303D-5H4533W  
Size: 0.45x33.33M

P303D-5H6033W  
Size: 0.6x33.33M

## 1000ml 3D SOFT UV DTF INK

It creates soft yet durable 3D raised effects. The resulting prints are highly flexible, resistant to cracking, and stick strongly to almost any fabric.



P303D-UVINK1000C (Cyan)  
P303D-UVINK1000M (Magenta)  
P303D-UVINK1000Y (Yellow)

P303D-UVINK1000K (Black)  
P303D-UVINK1000W (White)

## 3D PUFF UV DTF Printer-Spare Parts



	Printhead	Printer Mainboard	Printhead Mainboard	Cap Top	Ink Tube	Encoder Strip	Ink Damper	Wipe Blade
Model P 60	C60-PT1600E1	C60-ZB	C60-PTZB	OTTER-40XMD	C30-MG	C30-GST	C60-MN	C30G-MP
Model P 30	C30-PT3200	C30-CZB	C30-PTZB	C30-XMD			C30-MN	



01

Use DTF Printer to print your design



02

Spread hot melt powder evenly onto the film



04

Transfer design with OtterPro heat press

## Home Use & Retailer Solution

The desktop DTF series solves home use or retailer purposes. Focus on the targeted solutions to specific needs in the DTF printing process.



03

Melt powder using an oven dryer and purifier in a clean, fresh workspace.

## Mass Production Solution



01

Use the DTF system to print, shake and dry your design




02


Transfer design with OtterPro dual station heat press or large format heat press

# Model S 60 All-in-One Otter DTF System


The maximum print size of this large format all-in-one DTF printer is 60cm/23.6in, equipped with two advanced i3200 printheads, this printer delivers faster and more precise prints. It's perfect for printing on larger garments, jeans, trade show banners, posters, and allowing mass production of custom clothing and more large scale projects.




i3200 2 PCS



Print Width  
0-620mm/24.4in Max



Anti-Collision System

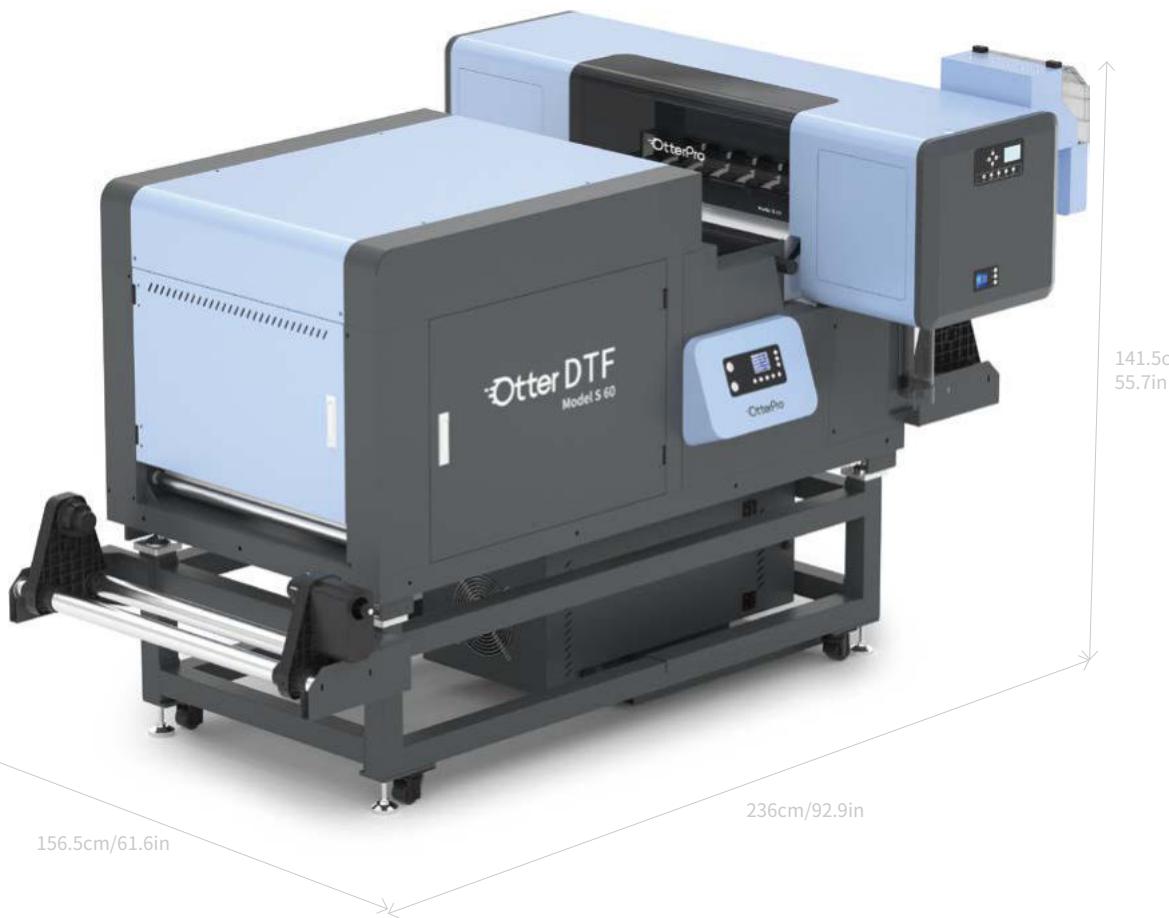

Note: The printer and shaker are sold as a set.


Model No.	OT-AIODTF60LB	Nozzle Resolution	360dpi 480dpi
Printhead	i3200 x2	Print Speed (High-speed, Bi-direction)	720*1200dpi (4pass) Print Speed: 14m <sup>2</sup> /H 720*1800dpi (6pass) Print Speed: 10m <sup>2</sup> /H 720*2400dpi (8pass) Print Speed: 6m <sup>2</sup> /H
Voltage/Power	3450W MAX±5% 110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Max. Input Current	AC220V, 16A / AC110V, 32A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	White ink automatic stirring circulation
Printer Software	OtterPro S 60 DTF	Adsorption Platform	Adjustable suction platform
Design Software	OtterPro RIP	Heating System	Three stages independent heating
Language Options (Software)	Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	Gigabit ethernet port (PC must have gigabit ethernet card)
Ink Type	Eco textile pigment ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	H1: K+C+M+Y H2: W+W+W+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.11 in	Product Dimensions	236 x 156.5 x 141.5 cm / 92.9 x 61.6 x 55.7 in
Print Width	0-620 mm / 0-24.4 in	Gross Weight(with wooden box)	581kg / 1280lb
ACCESSORIES: Cap Top x2, Ink Tube x4, Ribbon Cable x2, Ink Damper x2, Network Cable x1, 20ml Syringe x1, M3 Screw x12, M4 Screw x 6, Power Cord x1, Hex Key Set x1, Phillips Screwdriver x1		Powder Capacity	1.5kg / 3.3lb
NOTE: The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.			

# Model S 40 All-in-One Otter DTF System

Model S 40 is an All-in-One DTF printer that combines printing, powder shaking, curing, and purifying in one machine. With a maximum print width of 44.8cm/17.6in, it's compatible with the standard film widths in the market, including 30cm, 33cm, 42cm and more size.



i1600-A1 2 PCS



Print Width


0-420mm/16.5in Max



NOTE: DTF printer can be sold separately.

Model No.	OT-AIODTF40LB	Nozzle Resolution	300dpi 600dpi
Printhead	i1600-A1 x2	Print Speed (High-speed, Bi-direction)	720*1200dpi (4pass) 720*1800dpi (6pass) 720*2400dpi (8pass)
Voltage	2800W MAX±5% 220V±10% 50Hz	Print Mode	Print Speed: 3.5-5.0m <sup>2</sup> /h Print Speed: 2.5-3.5m <sup>2</sup> /h Print Speed: 2.0-3.0m <sup>2</sup> /h
Max. Input Current	AC220V,13A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	White ink automatic stirring circulation
Printer Software	OtterPro S 40 DTF	Adsorption Platform	Adjustable suction platform
Design Software	OtterPro RIP	Heating System	Three Stages Independent Heating
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	Eco textile pigment ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	H1: K+C+M+Y H2: W+W+W+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.11 in	Product Dimensions	220 x 100 x150 cm / 86.6 x 39.3 x 59 in
Print Width	0-420mm / 16.5in Max	Gross Weight(with wooden box)	380kg / 837lb
ACCESSORIES:		Powder Capacity	1.5kg / 3.3lb
Cap Top x2, Ink Tube x4, Ribbon Cable x2, Ink Damper x2, Network Cable x1, 20ml Syringe x1, M3 Screw x12, M4 Screw x 6, Power Cord x1, Hex Key Set x1, Phillips Screwdriver x1		NOTE:	The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.

# Powder Shaking System

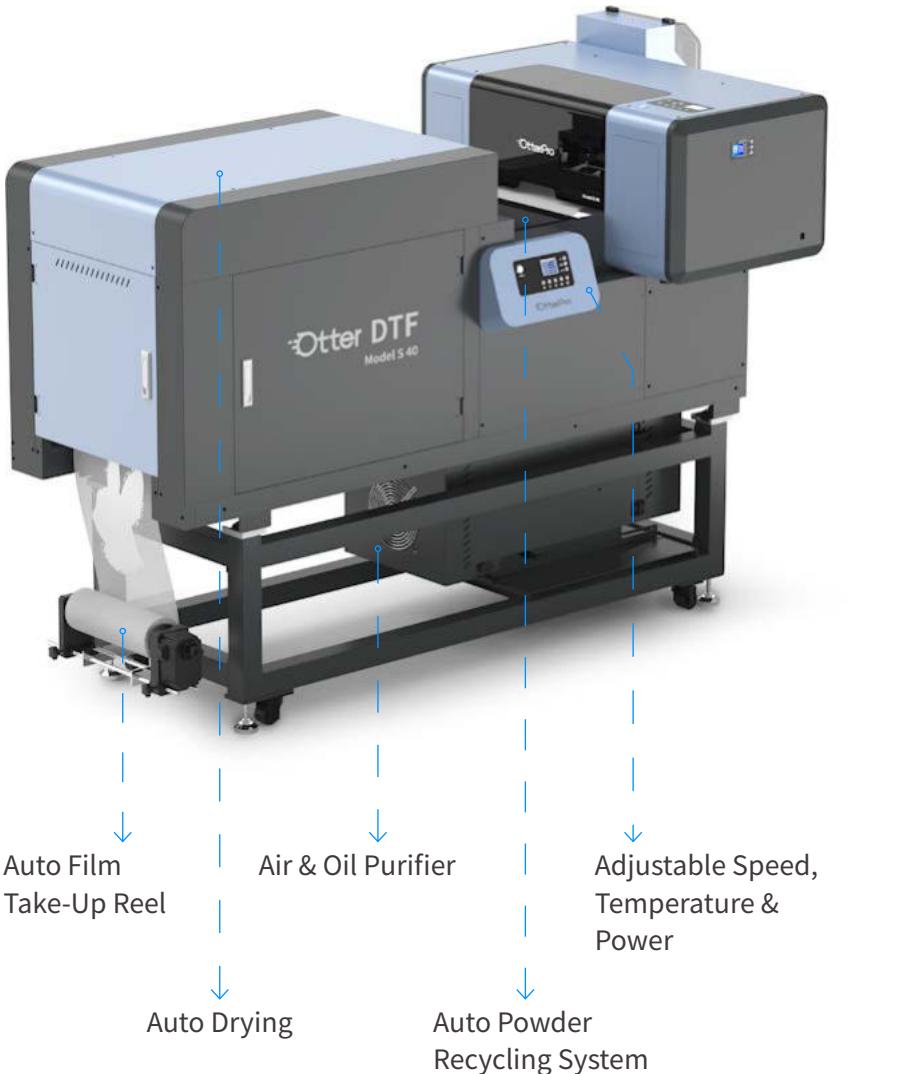


Simple & Easy to Operate

Printing, Shaking & Curing Integrated

Suitable for High & Low-volume Production

## All-in-One Automated DTF System

Equipped with sensors, the automated system enables one-touch controls for automatic printing, powder shaking, drying, and film winding.

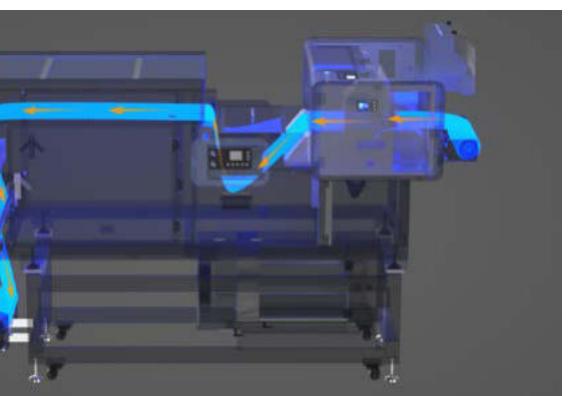


### Control Panel

Manage the speed, power and temperature of the powder shaking and drying system with this intuitive control panel.



### Auto Powder Recycling System

It can effectively improve the utilization rate of hot melt powder and minimize waste. In addition, it saves the hassle of shaking powder by hand, allowing the powder to be spread more evenly on the film.

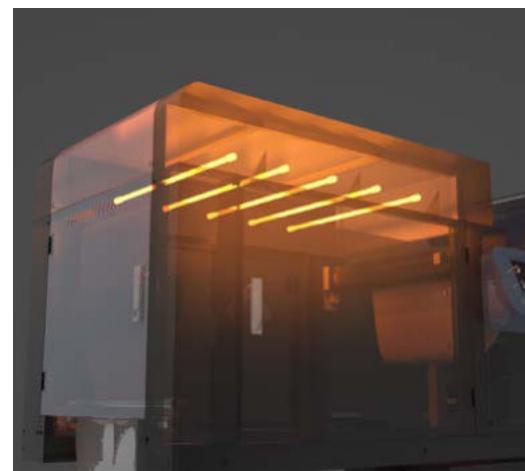


### Curing System

Equipped with five heating tubes and a larger drying area, our drying system ensures more uniform heating for your project, delivering superior outcomes.




### Auto Take-up Reel System

With the automatic take-up reel system, you can free up your hands in the final production stage, achieving intelligent and secure film winding.

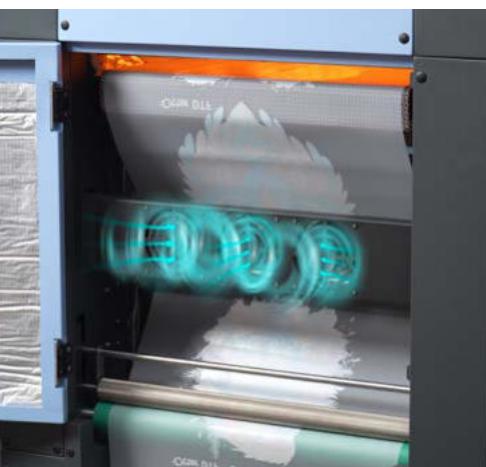

### Built-in Fans


After the printed film is baked in the oven, the built-in fans accelerate film cooling and improve work efficiency.

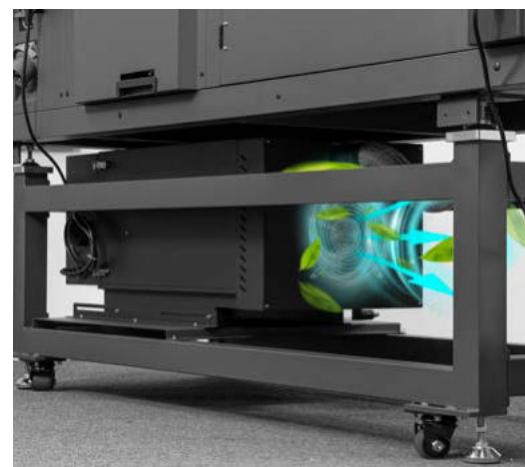

### Integrated Purifier

The air and oil purifier system can automatically treat smoke and oil and promote well-being and productivity. (No need to replace the filter cotton)

# Advantages of Model S Series Printers



## Stable & Quiet

DC motor controller  
Double silent circular guide rails  
Steel body




## Auto System

White ink circulation system  
White ink stirring  
Suction system  
Automatic cleaning  
Adjustable three-stage heating



## Alert System

Low ink alerts  
Waste ink alerts  
Film-out detection

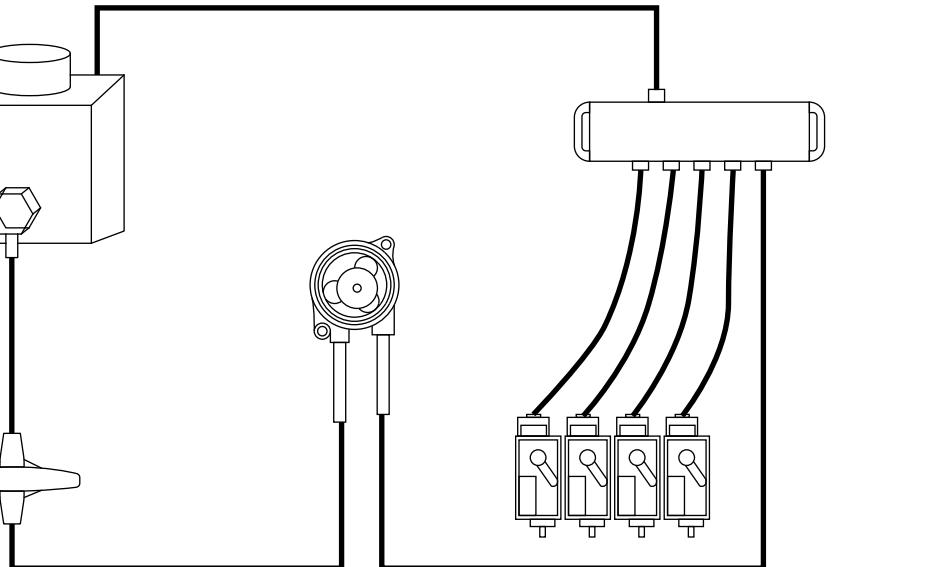


## Adjustable white ink circulation

Consistent Print Quality. Increased Efficiency. Cost Savings.  
Peristaltic pump with moderate pressure and great gas sealing to protect the printhead.




## Ink Supply System

Clear ink markings save the hassle of pouring the wrong ink. The built-in alarm sensor reminds you to add ink in time, minimizing damage to the printer.

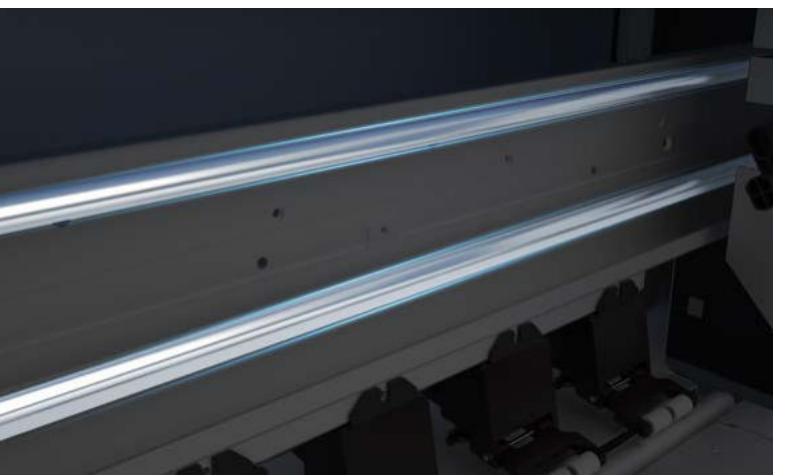


## Mute Guide Rail

Enhance operational stability with minimal noise.

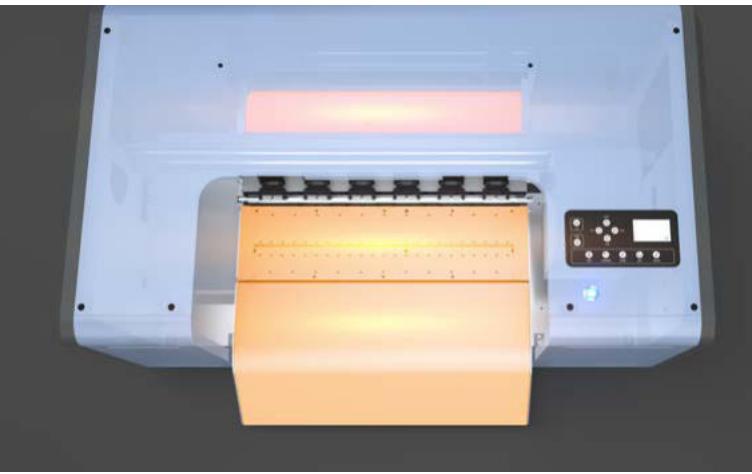

## Three-stage Heating System

Accelerate DTF Ink drying speed on the film to guarantee optimal image quality before applying powder.

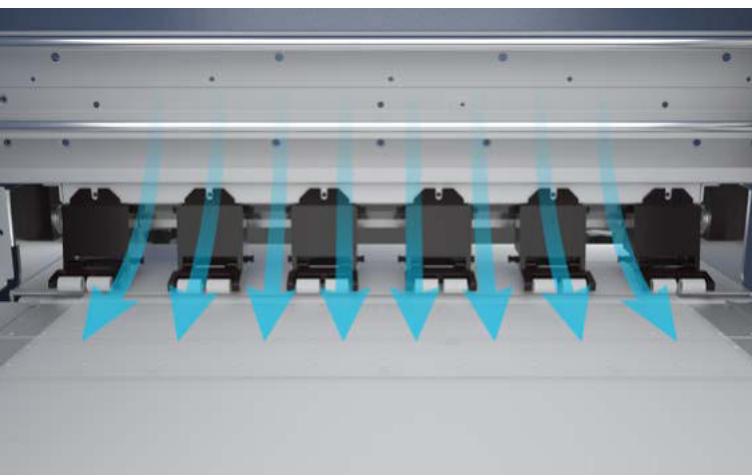


## Adjustable Vacuum Suction Platform

Deliver precise color printing with no deviations, ensuring a flat and seamless film output.

# Model M 30 DTF Printer

Model M 30 is a compact, desktop DTF printer perfect for home use and workshop. The maximum print size is 330mm/13in, ideal for most small business needs. It's equipped with an F1080 printhead for stable and precise prints. Plus, it also comes with a handy cutter that makes film cutting easier.



**XP600(F1080) 1 PCS**



**Detachable Film Trimmer**




**Adjustable System**

White ink circulation system  
White ink stirring  
Suction system  
Front stage heating



**Auto System**

Automatic cleaning

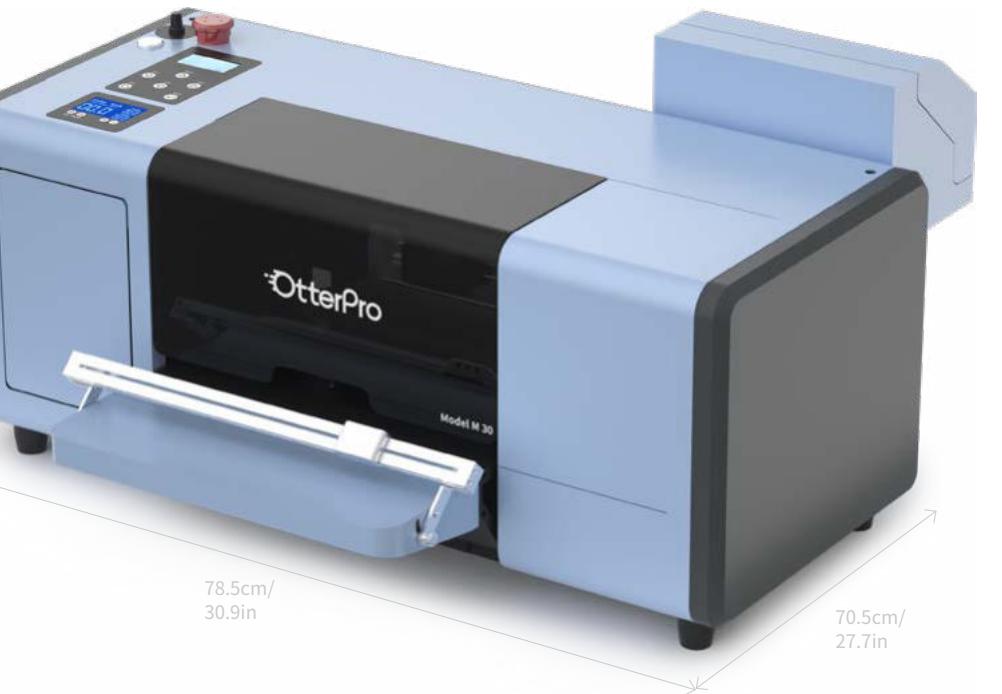

**Alert System**

Waste ink alerts



**Glue-Sealed Printhead Connector**

Waterproof design prevents burnout



**Vacation Mode**

The printer can perform self-maintenance and run on low power in vacation mode.

Model No.	<b>MODEL30LB</b>	Print Accuracy	1440dpi
Printhead	XP600(F1080) x1	Print Speed	720*900dpi (4pass) Print Speed: 4m <sup>2</sup> /H 720*1080dpi (6pass) Print Speed: 2m <sup>2</sup> /H 720*1400dpi (8pass) Print Speed: 1.2m <sup>2</sup> /H
Voltage	110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Power	300W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Adjustable white ink circulation system Adjustable white ink stirring
Printer Software	OtterPro M 30 DTF	Adsorption Platform	Adjustable suction system
Design Software	OtterPro RIP	Heating System	Adjustable front stage heating
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	3.0 USB cable
Ink Type	Eco Textile Pigment Ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	H1: K+C+M+Y +W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.11 in	Printer Specification	78.5 x 70.5 x 39.5 cm / 30.9 x 27.7 x 15.5 in 37kg / 81lb
Print Width	0-330 mm / 0-13in	Package Dimension	103.5 x 48 x 54.5 cm / 40.7 x 18.8 x 21.4 in 50kg / 110lb

**ACCESSORIES:**

Ink Damper X3, Cap Top X1, Ink Pump x1, Ribbon Cable X2, Sensor Limit Switch x1, Ink Tube X1, Peristaltic Pump X1, Syringe X1, Bubble Level x1, Hex Key Set X1, Phillips Screwdriver X1, M4 Screw Set X1, Encoder Strip X1, Glove X2, Wiper Blade X1

**NOTE:**

The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.



### Compact & Desktop

Compact desktop design, no extra stand required, ideal for small batch production at home or workshop.




### Adjustable White Ink Circulation

The white ink circulation system effectively prevents sedimentation and lowers the probability of printhead clogging.



### Detachable Film Trimmer

With the detachable film trimmer, you can easily cut the film to fit your oven dryer, or detach it as an individual trimmer for your craft projects.

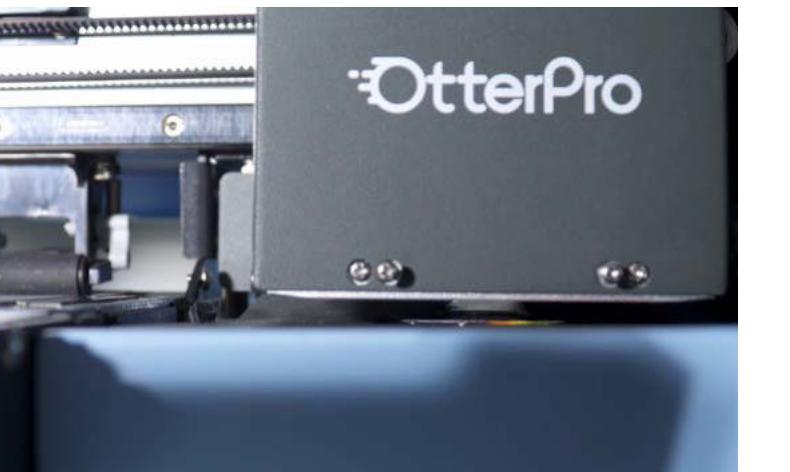


### Auto Cleaning

It helps to maintain print quality and prevent clogging of the printheads.



### Adjustable Pinch Rollers

This design ensures the film moves smoothly and consistently, without any slippage.

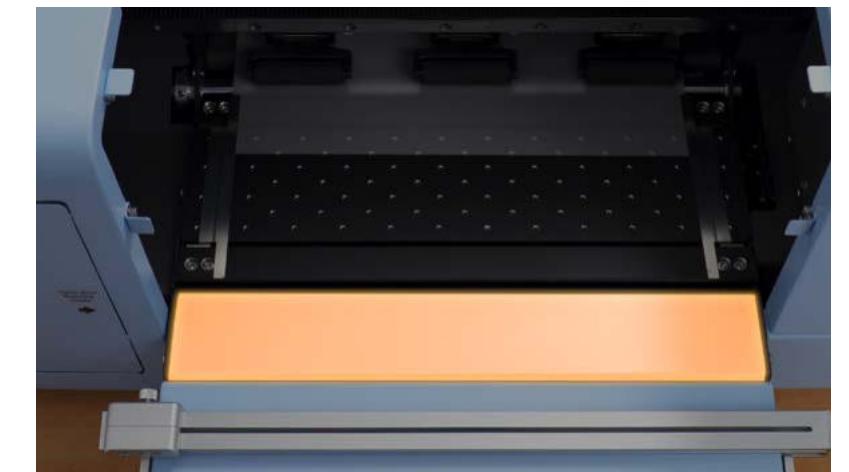

### Heating Platform

Accelerate DTF Ink drying speed on the film to guarantee optimal image quality before applying powder.



### Adjustable Suction Platform

Deliver precise color printing with no deviations, ensuring a flat and seamless film output.



### Inspection Door

This lift-up opening design makes maintenance easier and also has space for storing screws and other items while you work.

## HOT & COLD PEEL DTF FILM

### DOUBLE-SIDED MATTE

The double-sided matte DTF film features an anti-static design, the pre-treated film that ensures smooth, non-slip printing. Its strong adhesion absorbs DTF inks, ensuring high definition and vibrant color output.

Size	DOUBLE-SIDED
A3	OT-DTFFILMA3
A4	OT-DTFFILMA4
0.3m*10m	OT-DTFFILM3010
0.3m*100m	OT-DTFFILM30100
0.42m*100m	OT-DTFFILM42100
0.6m*100m	OT-DTFFILM60100
0.9m*100m	OT-DTFFILM90100



-  Breathable
-  Soft Texture
-  Wash-Resistant
-  Long-Lasting
-  Vibrant Color
-  High Definition
-  Strong Adhesion
-  Stretchable



### Gradient Series/Glitter Series/Glow in Dark COLD PEEL



Size	GOLD	GRADIENT	GLITTER SILVER	GLITTER GOLD	GLITTER RAINBOW	HOLOGRAPHIC	GLOW IN DARK
A3	OT-DTFFILMGDA3	OT-DTFFILMJBA3	OT-DTFFILMZA3	OT-DTFFILMSGA3	OT-DTFFILMXCA3	OT-DTFFILMHCA3	OT-DTFFILMYG3
A4	OT-DTFFILMGDA4	OT-DTFFILMJBA4	OT-DTFFILMZA4	OT-DTFFILMSGA4	OT-DTFFILMXCA4	OT-DTFFILMHCA4	OT-DTFFILMYG4
0.3m*10m	OT-DTFFILMGD3010	OT-DTFFILMJB3010	OT-DTFFILMZS3010	OT-DTFFILMSG3010	OT-DTFFILMXC3010	OT-DTFFILMHC3010	OT-DTFFILMYG301
0.3m*100m	OT-DTFFILMGD30100	OT-DTFFILMJB30100	OT-DTFFILMZS30100	OT-DTFFILMSG30100	OT-DTFFILMXC30100	OT-DTFFILMHC30100	OT-DTFFILMYG3010
0.42m*100m	OT-DTFFILMGD42100	OT-DTFFILMJB42100	OT-DTFFILMZS42100	OT-DTFFILMSG42100	OT-DTFFILMXC42100	OT-DTFFILMHC42100	OT-DTFFILMYG42100
0.6m*100m	OT-DTFFILMGD60100	OT-DTFFILMJB60100	OT-DTFFILMZS60100	OT-DTFFILMSG60100	OT-DTFFILMXC60100	OT-DTFFILMHC60100	OT-DTFFILMYG60100

### Available Sizes for All DTF Film



## OtterPro Ultra DTF Ink

OtterPro Ultra DTF ink is an eco-friendly, water-based ink made with non-toxic ingredients and a special formula. When used with OtterPro Precipitation-Free DTF White Ink, it ensures clog-free printheads and provides smooth, consistent ink flow without settling.



Easy to Transfer



Deep Whites for Vibrant Results



### 500ml Ultra DTF Ink

High Density Anti-clog Ink

OT-DTFINK500C (Cyan)  
OT-DTFINK500M (Magenta)  
OT-DTFINK500Y(Yellow)  
OT-DTFINK500K (Black)  
OT-DTFINK500W (White)



### 1000ml Ultra DTF Ink

High Density Anti-clog Ink

OT-DTFINK1000C (Cyan)  
OT-DTFINK1000M (Magenta)  
OT-DTFINK1000Y(Yellow)  
OT-DTFINK1000K (Black)  
OT-DTFINK1000W (White)

## Classic DTF Powder



Strong Adhesion



Good Wash Durability



Eco-friendly



Cost-effective



High Color Fastness



No Color Fading

## OtterPro DTF ink

### Sustainable Inks

OtterPro DTF pigment ink is eco-friendly and water-based ink, made with non-toxic ingredients that are safe to use and soft to the touch, perfectly in line with our commitment to sustainability.



Eco-friendly



Easy to Transfer



Deep Whites for Vibrant Results



### 500ml DTF ink

OT-DTFINK500C (Cyan)  
OT-DTFINK500M (Magenta)  
OT-DTFINK500Y (Yellow)  
OT-DTFINK500K (Black)  
OT-DTFINK500W (White)



### 1000ml DTF ink

OT-DTFINK1000C (Cyan)  
OT-DTFINK1000M (Magenta)  
OT-DTFINK1000Y (Yellow)  
OT-DTFINK1000K (Black)  
OT-DTFINK1000W (White)



OT-DTFPDT600 600g  
OT-DTFPDT1000 1000g



OT-DTFRRF500 500g  
OT-DTFRRF1000 1000g  
OT-DTFRRF3500 3500g



OT-UTRRF1000PK 500g(Black)

## DTF Printer-Spare Parts



	Printhead	Printer Mainboard	Printhead Mainboard	Cap Top	Ink Tube	Encoder Strip	Drive Belt
Model S 60 DTF	OTTER-I3200A1PT	OTTER-60ZB	OTTER-60PTZB	OTTER-60XMD	OTTER-60MG	OTTER-60GST	OTTER-60CSD
Model S 40 DTF	OTTER-I1600PT	OTTER-40ZB	OTTER-40PTZB	OTTER-40XMD	OTTER-40MG	OTTER-40GST	OTTER-40CSD
Model M 30 DTF	M30-PTF1080	M30-ZB	M30-PTZB	M30-XMD	M30-MG	M30-GST	M30-CSD



	Temp. Control Mainboard	White Ink Circulation Splitter	Ink Filter	Wiper Blade	Ink Damper
Model S 60 DTF/ Model S 40 DTF	OTTER-40WKZB	OTTER-40FLQ	OTTER-40GLQ	OTTER-40GMP	OTTER-40MN
Model M 30 DTF	/	/	/	M30-GMP	M30-MN

\*Subject to the specifications of the actual product.

## Tri-layer A3 DTF Dryer Pro

Perfect Partner for Your Desktop DTF Printer

The Desktop A3 DTF Dryer features a unique tri-layer design that cures prints quickly and efficiently, making it ideal for high-volume production.



**Built-in Air Purifier**

**OT-DRYA3LB**

**OT-FLLB**

**External Air Purifier**



Both models feature a highly efficient air purification system that keeps your workspace air fresh.

Item No.	Power	Voltage	Temp. Range	Time Range	Film Size
OT-DRYA3LB	1500W MAX±5%	220V / 110V 50~60Hz	104-302 °F (40-150°C)	1-60min	300 x 420mm / 11.8 x 16.5 in
OT-DRYA3LB	1450W MAX±5%				
OT-FLLB	150W MAX±5%				



### Even Heating

The desktop DTF dryer features a hot air circulation design that ensures even heating and melting powder, delivering crisper, more durable and vibrant prints.

**Better Results: The upgraded heating tunnel prevents oiling with a better curing effect**

**Max. temperature up to 150°C**



### High Efficiency

The maximum curing size is 30x42cm/11.8x16.5in, its three-layer design dries 3 sheets of A3 or 6 sheets of A4 film at a time, making it an efficient choice for DTF projects.



# Model C 60 UV DTF Printer

Model C 60 is a large-format UV DTF printer with a maximum print width of 62cm (24.4 inches). Equipped with 3 i1600-E1 printheads, specifically designed for industrial-grade printing, it delivers exceptional performance for handling larger sizes and high-volume UV DTF printing tasks. This printer is built to meet the demands of business and industrial production, ensuring efficiency, reliability, and superior print quality for your projects.




## Standard Clear UV DTF Printing

UV DTF Sticker



**i1600-E1**  
3 PCS

**Print Width**  
0-620 mm / 0-24.4 in MAX

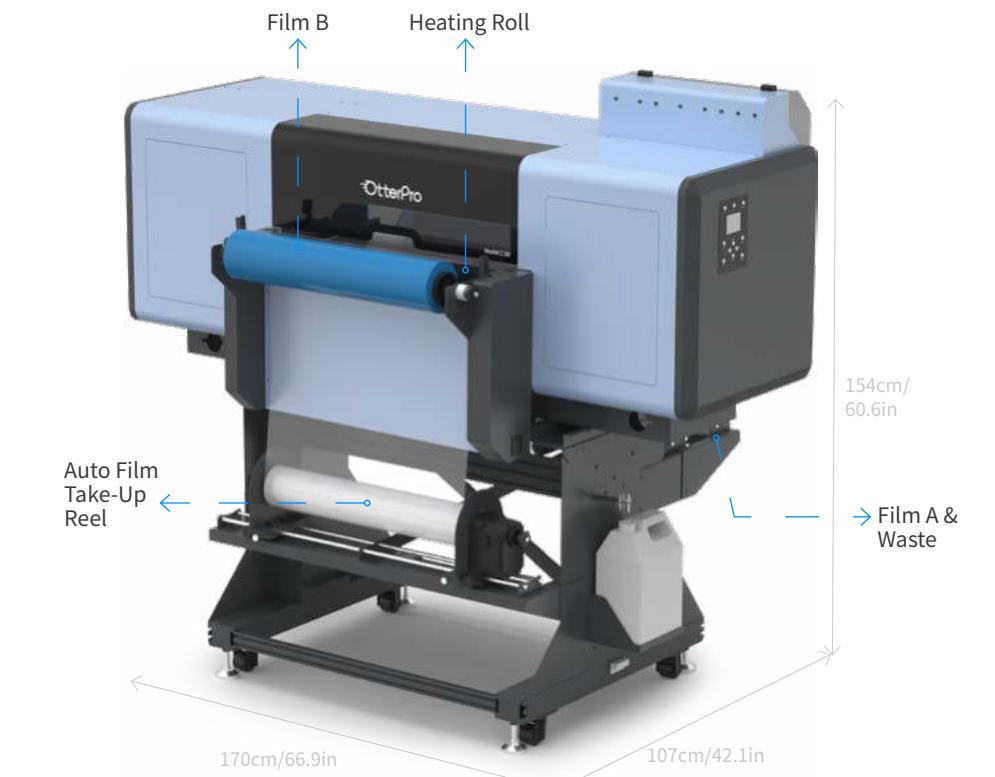

**Auto System**  
White ink stirring  
Suction system  
Automatic cleaning  
Adjustable heating rollers



**Alert System**  
Low ink alerts  
Film-out detection

Model No.	MODEL C 60 LB	Nozzle Resolution	300dpi 600dpi
Printhead	i1600 E1 x3	Print Speed	960*900dpi (6pass) 960*1200dpi (8pass) Print Speed: 3.5-5.0m <sup>2</sup> /h Print Speed: 2.5-3.5m <sup>2</sup> /h
Voltage	110V/220V±10% 50-60Hz	Print Mode	Uni-direction / Bi-direction
Power	330W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Auto white ink stirring
Printer Software	OtterPro C 60 UV DTF	Printhead Maintenance	Automatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV DTF Ink	Inspection System	Low ink alerts / Film-out detection
Ink Color	H2: W+W+W+W H3: K+C+M+Y H4: V+V+V+V	System Requirements	Window 7 or above (macOS system is not supported)
Printing Method	A complete white ink, color, varnish hierarchical order printing	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.011 in	Printer Specification	170 x 107 x 154 cm / 66.9 x 42.1 x 60.6 in 280kg / 617lb
Print Width	0-620 mm / 0-24.4 in	Package Dimension	148 x 220 x 110 cm / 58.2 x 86.6 x 43.3 in 350kg / 771lb
NOTE: The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.			



### 3D Relief Effect

Equipped with I1600 E1 printheads, it effortlessly creates 3D relief effects and textures on both soft and hard substrates.




### Mute Guide Rail

Mute Guide Rail Equipped with industry-leading guide rails, this printer ensures high precision and stable performance with minimal noise.



### Smart Auto System

Features automatic cleaning, self-maintenance, low ink alerts, and film-out detection.

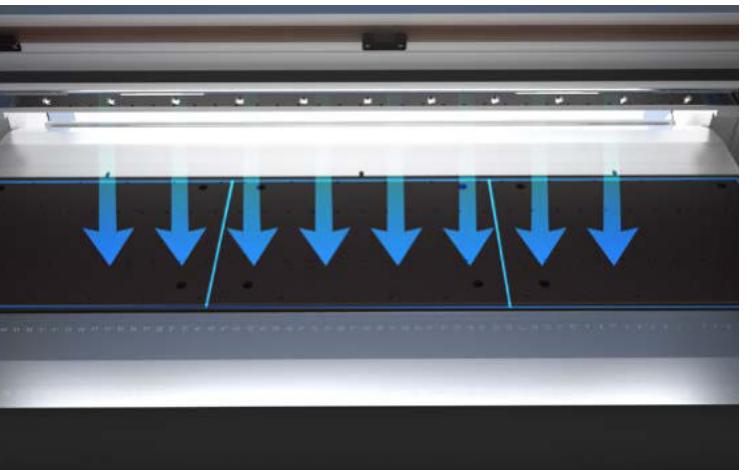


### Three-stage Vacuum Suction Platform

The 3-stage adjustable vacuum suction platform holds films securely in place, ensuring smooth, flawless printing every time, while also preventing printhead scratches from film contact.



### Adjustable Heating Rollers

Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.

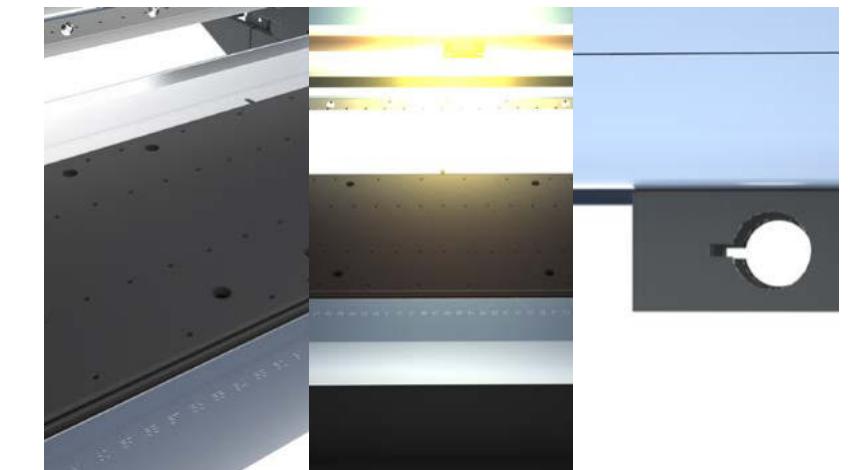


### Premium Construction Features

Corrosion-resistant treated surface and print platform for enhanced durability; integrated LED lights for illumination; the base frame features designed cutouts for convenient machine relocation.



### Leadshine Stepper Motor

The advanced industrial-quality motor ensures smooth, precise and stable motion for your projects.

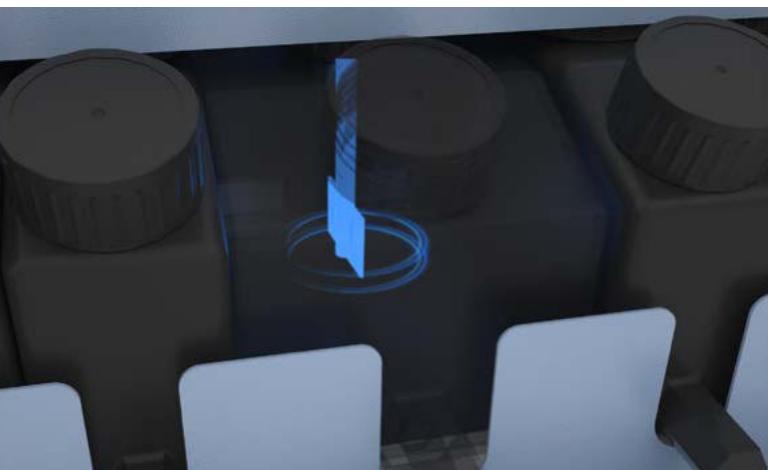

### Adjustable White Ink Auto Stirring


Prevent white ink precipitation, minimize clogging risks, and extend the lifespan of your UV DTF printer.

# Model C 30 UV DTF Printer

Model C 30 is a UV DTF printer that combines printing and lamination in one machine. No heat press is required, apply your stickers onto wood, metal, plastic, glass, acrylic, paper and almost any smooth, hard, cylindrical objects with ease!



**i3200-U1 HD  
1 PCS**




**Print Width**  
0-300mm/11.8in Max



**Alert System**  
Low ink alerts  
Waste ink alerts



**Auto System**  
White ink circulation system  
Suction system  
Automatic cleaning  
Adjustable heating rollers

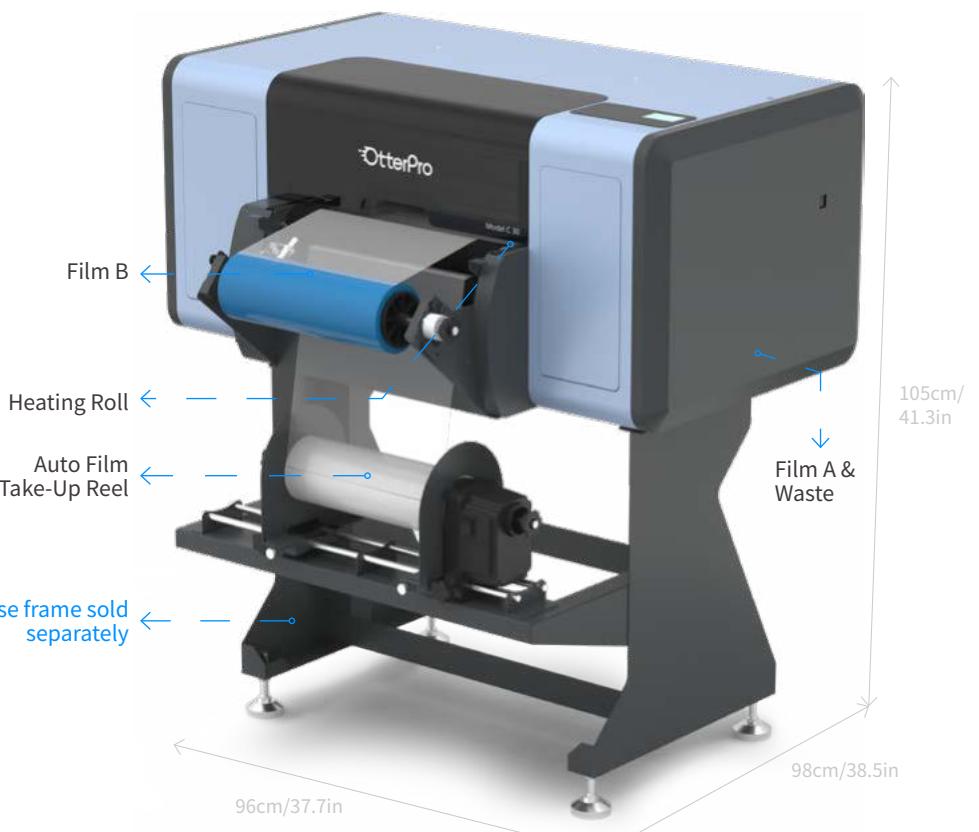

## All-in-One UV DTF System

This automated machine handles printing, lamination, waste film take-up, and puff effect, making it a cost-effective and efficient way to kickstart your business.

Model No.	<b>MODEL C30LB</b>	Nozzle Resolution	300dpi 600dpi
Printhead	i3200-U1 HD (8 Colors) x1	Print Speed	960*600dpi (4pass) 960*900dpi (6pass) 960*1200dpi (8pass)
Voltage	110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Power	410W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Auto white ink circulation system
Printer Software	OtterPro C 30 UV DTF	Printhead Maintenance	Automatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV DTF Ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	K+C+M+Y+W1+W2+V1+V2	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Printing Method	A complete white ink, color, varnish hierarchical order printing	Printer Specification (Base frame not included)	96 x 98 x 45 cm / 37.7 x 38.5 x 17.7 in 75kg / 165lb
Print Width	0-300 mm / 0-11.8 in	Package Dimension	112 x 112 x 63 cm / 44 x 44 x 24.8 in 95kg / 209lb


### NOTE:

The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.



## High Resolution

Compatible with i3200 u1 printhead with 600 dpi high-density resolution, ensures high color reproduction and high-quality prints.

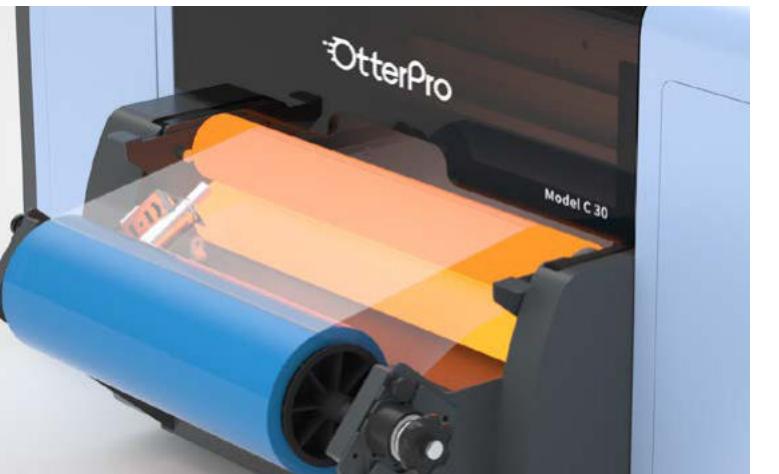

## Adjustable Heating Rollers

Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.




## Compact & Desktop

Compact desktop design, no extra stand required, ideal for small batch production at home or workshop.




## Integrated Printing & Lamination

Model C 30 integrates printing, curing, and laminating in a single process. No heat press and cutter required to create permanent stickers for your projects. (Extra protection for integrity and safe transport)

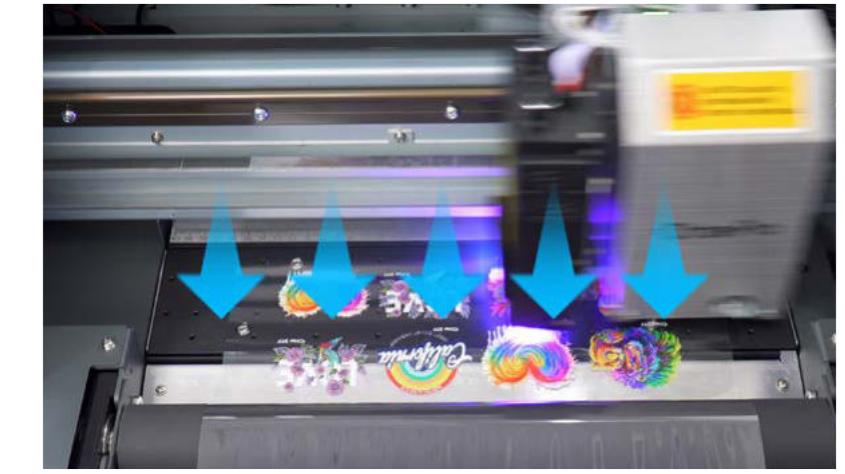


## Adjustable Vacuum Suction Platform

With an adjustable vacuum suction platform, the film adheres firmly to the platform, ensuring a smooth printing process.

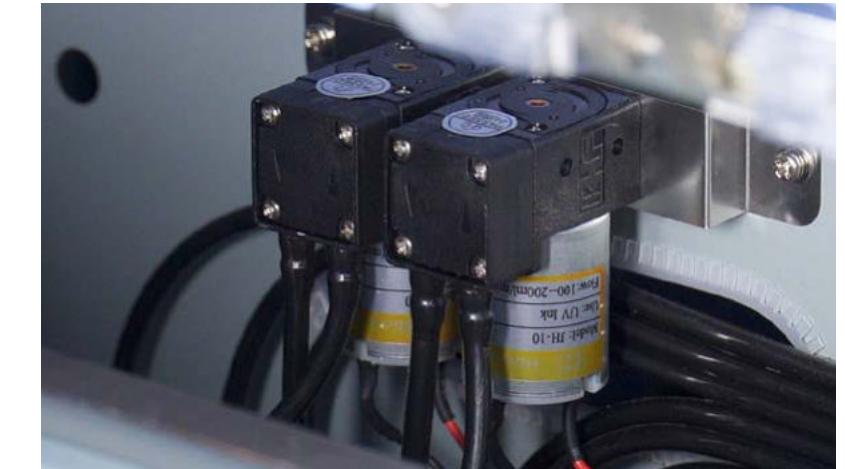


## Auto White Ink Circulation

Equipped with two peristaltic pumps, this system keeps the ink in constant motion, reducing the risk of white ink clogging and extending the service life of your UV DTF printer.

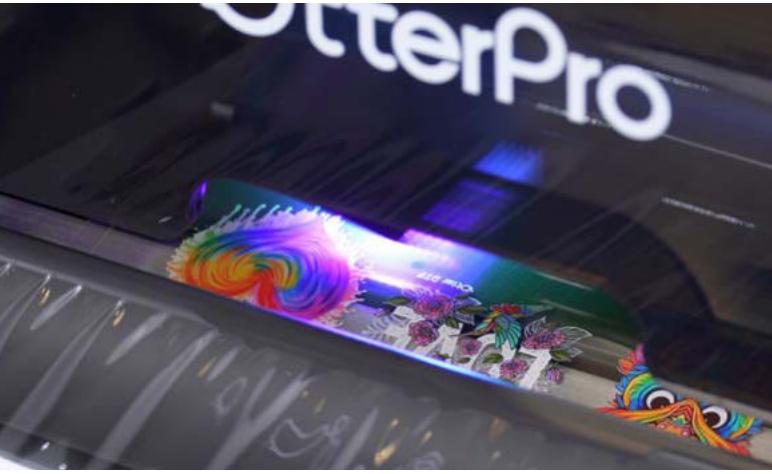

## Built-in UV LED Lights

The built-in ultraviolet lights enable simultaneous printing and curing, and are ready for lamination!

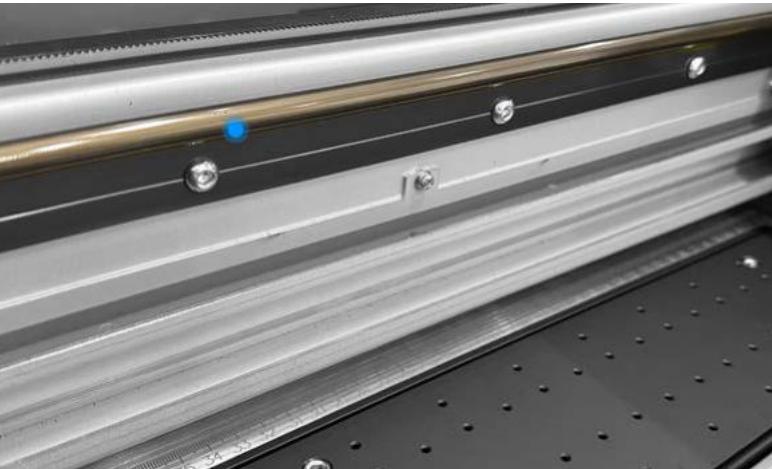

## Mute Guide Rail

The upgraded guide rail ensures high precision and stable performance with minimal noise.

# UV DTF Film (A+B)

For Hard Surface Sticker



## Ultra UV DTF Transfer Film

C3030100TAB      C3060100TAB  
A Film+B Film      A Film+B Film  
Size: 0.3\*100M      Size: 0.6\*100M

## UV DTF Transfer Film

C3032100CA      C3032100CB  
UV DTF A Film      UV DTF B Film  
Size: 0.32\*100M      Size: 0.32\*100M

# UV DTF Ink



## 500ml UV DTF Ink

C30-INK500C (Cyan)  
C30-INK500M (Magenta)  
C30-INK500Y (Yellow)  
C30-INK500K (Black)  
C30-INK500W (White)  
C30-INK500V (Vanish)



## 1000ml UV DTF Ink

C60-INK1000C (Cyan)  
C60-INK1000M (Magenta)  
C60-INK1000Y (Yellow)  
C60-INK1000K (Black)  
C60-INK1000W (White)  
C60-INK1000V (Gloss Varnish)


# UV DTF Printer-Spare Parts



	Printhead	Printer Mainboard	Printhead Mainboard	Cap Top	Ink Tube	Encoder Strip	Ink Damper	Wiper Blade
Model C 60 Pro	C60-PT1600E1	C60-ZB	C60-PTZB	OTTER-40XMD	C30-MG	C30-GST	C60-MN	C30-GMP
Model C 60				C30-XMD			C30-MN	
Model C 30	C30-PT3200	C30-CZB	C30-PTZB					

\*Subject to the specifications of the actual product.

# OtterPro Multi-language RIP Software

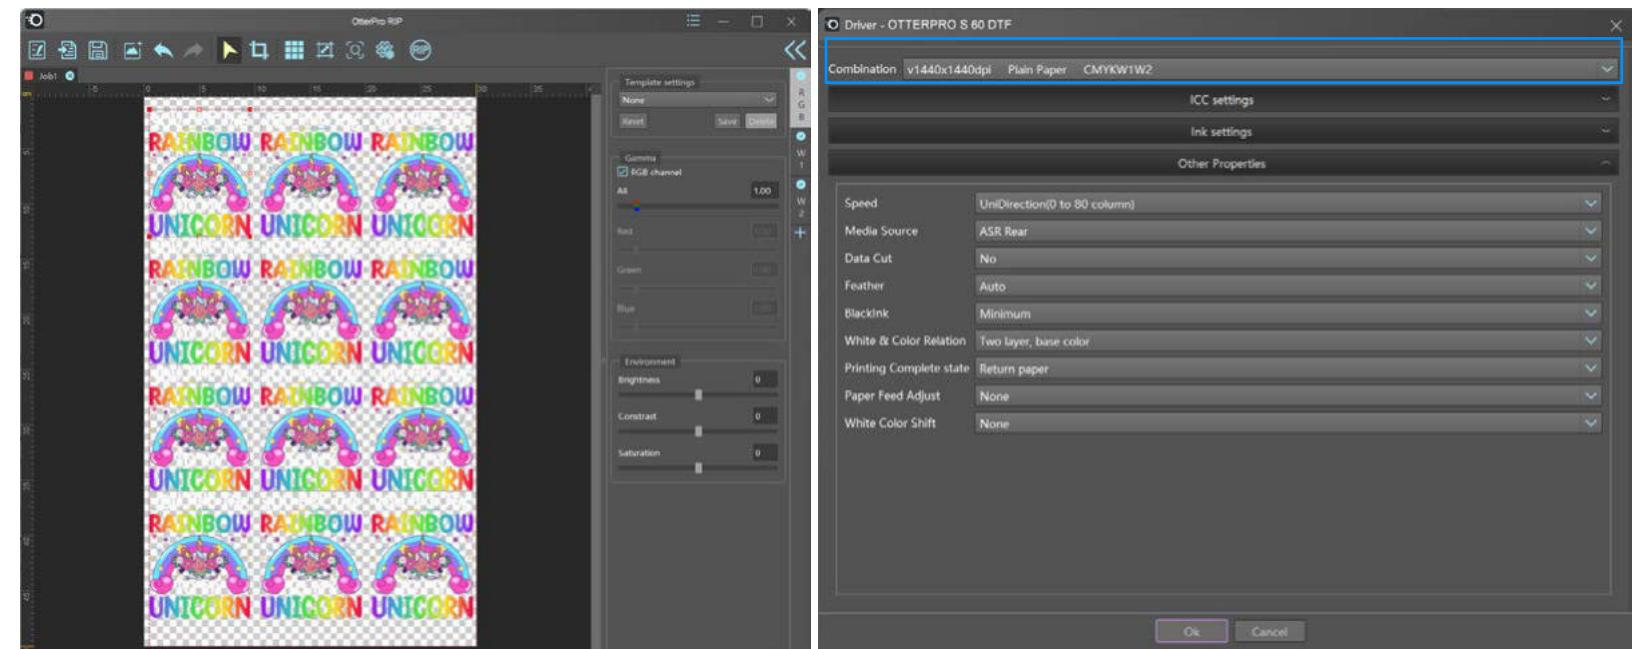

## Auto Layout

Batch printing with high efficiency



## OtterPro RIP Software

This software significantly boosts the productivity of DTF printing projects! It features a simple yet powerful interface, enabling you to effortlessly master image editing and design. Moreover, it supports multi-image automatic layout and duplicate printing, greatly enhancing work efficiency. The superior color output ensures DTF printers achieve "what you see is what you get" results!

## You don't need to select a channel!

Skip configuring a specific channel in your Photoshop software for your current print job. Just save your file in PNG transparent format, export it, and print directly. This saves time and eliminates hassle, allowing for easy management of your software.

## Applicable to all OtterPro Printer Systems

- Model S 60
- Model S 40
- Model M 30
- Model C 60
- Model C 30
- Model P 60
- Model P 30

## DTF Maintenance Solution





## UV DTF Maintenance Solution



Washing Solution 1  
Cleaning Solution 2  
Protection Solution 3

## Other Maintenance Supplies

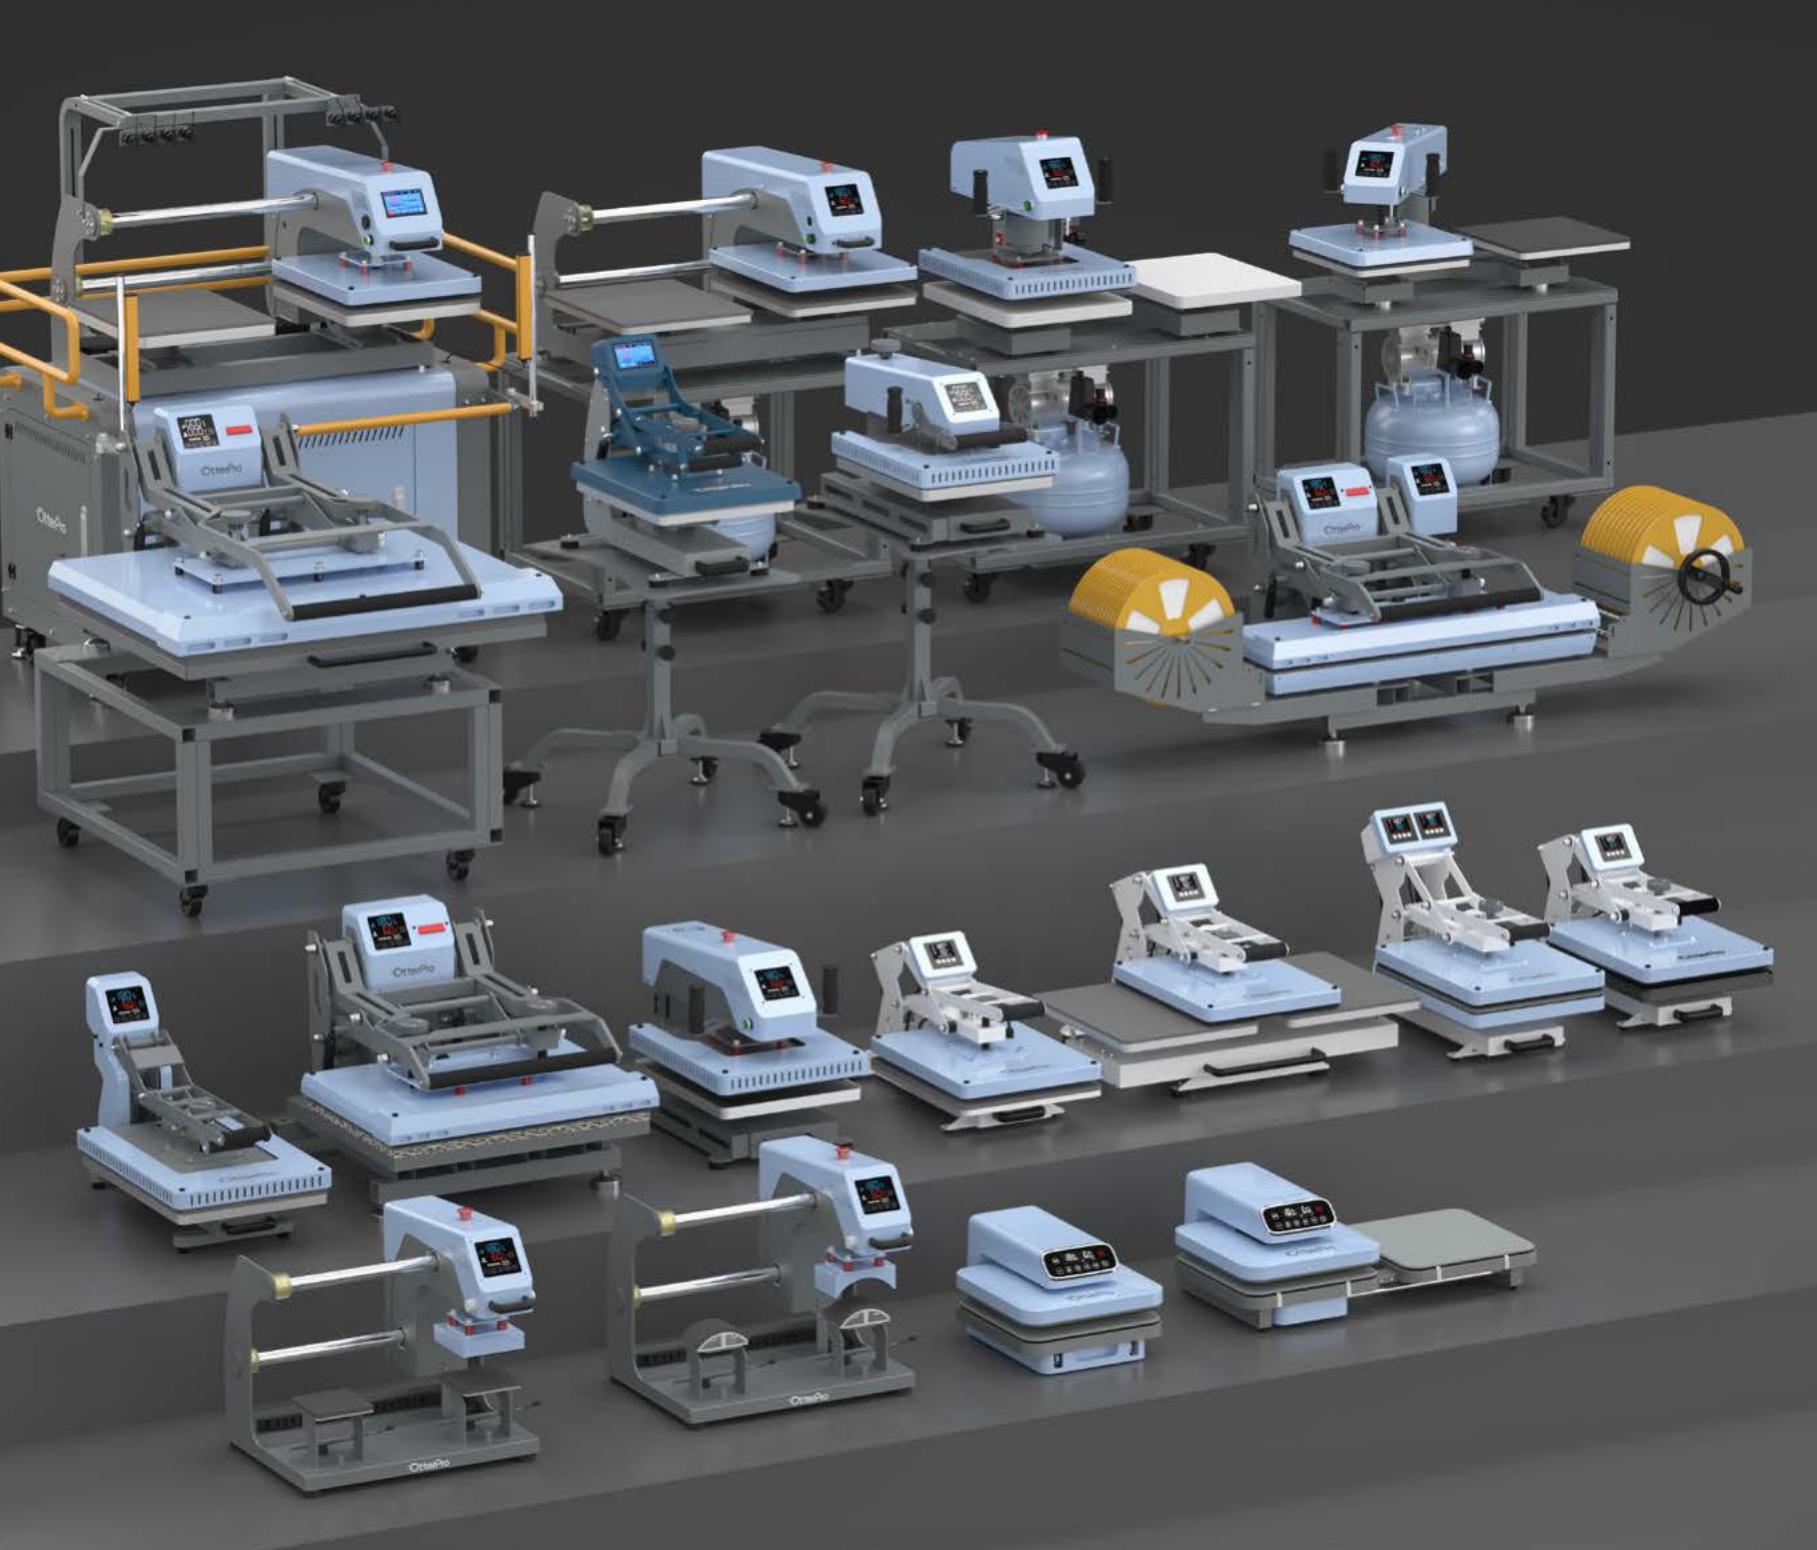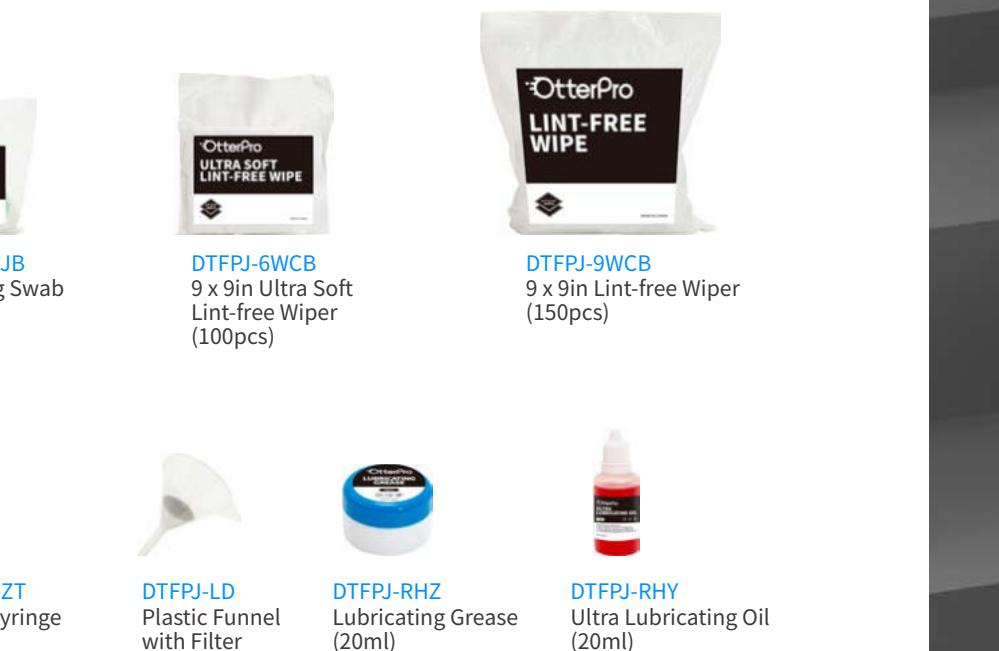

## OTTERULTRA HEAT PRESS G1



OU-G14050MB  
40\*50cm

## CLAMSHELL HEAT PRESS P9 SERIES



OT-P93838LB  
38\*38cm

OT-P94050LB  
40\*50cm




OT-P94060LB  
Horizontal Model  
40\*60cm

OT-P94060SLB  
Vertical Model  
40\*60cm

## CLAMSHELL HEAT PRESS P11 SERIES



OT-PB4050SMDLB  
Single Platen  
38\*38/40\*50/40\*60cm



OT-DSPB4050LB  
Dual Platen  
40\*50cm



OT-PBD4050  
DTG Curing  
40\*50cm



OT-PBS4050  
Top & Bottom Heat Dual Control  
40\*50cm

## AUTO HEAT PRESS



OT-AUPB3838FLB  
Single Platen  
38\*38cm



OT-DAUPB3838LB  
Dual Platen  
38\*38cm

## LARGE FORMAT HEAT PRESS P12 SERIES



OT-PBAS25100DLB  
Double-sided Printable/Lanyard Feeding Device  
25\*100cm



OT-PBA25100DLB  
Lanyard Feeding Device  
25\*100cm



OT-PBAD25100DLB  
25\*100cm




OT-PB80100DLB  
80\*100cm



OT-PB6080DLB  
60\*80cm



OT-PBB4080DLB  
40\*80cm



OT-PBD5070DLB  
50\*70cm



OT-PBC5060DLB  
50\*60cm

## SLIDING HEAT PRESS P16 SERIES



OT-QSHCPLB  
Air Press Cap Press



OT-QSHYE151LB  
Air Press Label Maker



OT-YT4050LB  
40\*50cm



OT-QSYT4050LB  
Air Press  
40\*50cm



OT-DQSPBY3838LB  
Air Press  
38\*38cm



OT-DQSPBY4050LB  
Air Press  
40\*50cm



OT-QSH4050LBN  
OT-QSH4060LB  
Slide  
40\*50/40\*60cm




OT-AUQSH4050LB  
Auto  
40\*50cm

# OtterUltra

## HEAT PRESS G1

### STEP INTO THE SMART ERA

Revolutionize Your Work with  
Next-Gen Heat Press

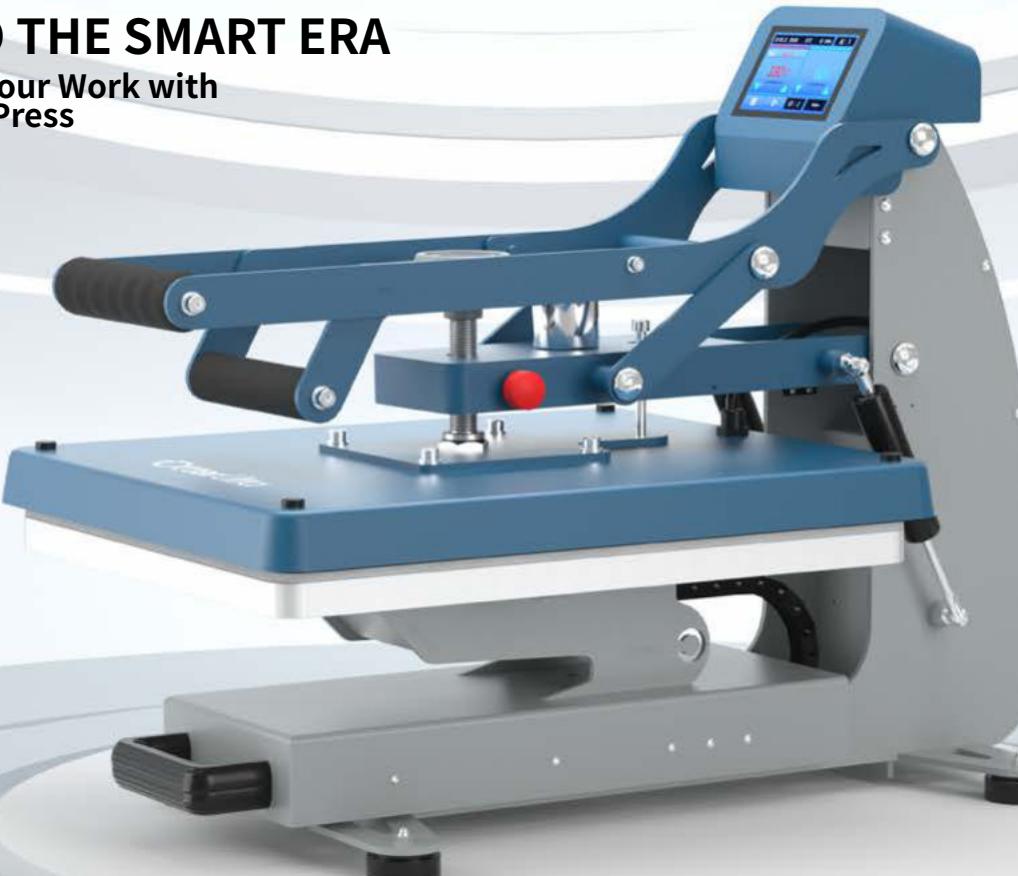

### ALL-AROUND UPGRADE

- Touch Screen Panel
- Customizable User-Friendly System
- Superior Hardware



## Smart System



Smart Control Panel



On-Screen Keyboard



Real-Time Pressure Level



Temp & Humidity Display



Multi-User Management



Daily Output Records



Self-Diagnostic Program



Replaceable Wallpaper



7 Languages Supported



Save Custom Parameters & Materials



User Guide




Data Migration  
(Stay Tuned!)

## Superior Hardware

### Thicker Heating Platen


An upgraded, thicker heating platen ensures superior heat retention and even heat distribution.

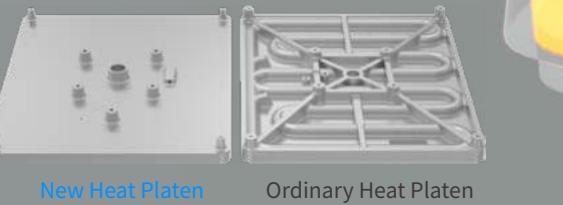


New Heat Platen      Ordinary Heat Platen

### Reinforced Base Platen

Built with a wider and stronger structure for exceptional flatness and consistent heating performance.

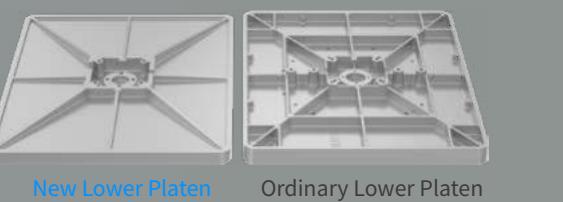

New Lower Platen      Ordinary Lower Platen

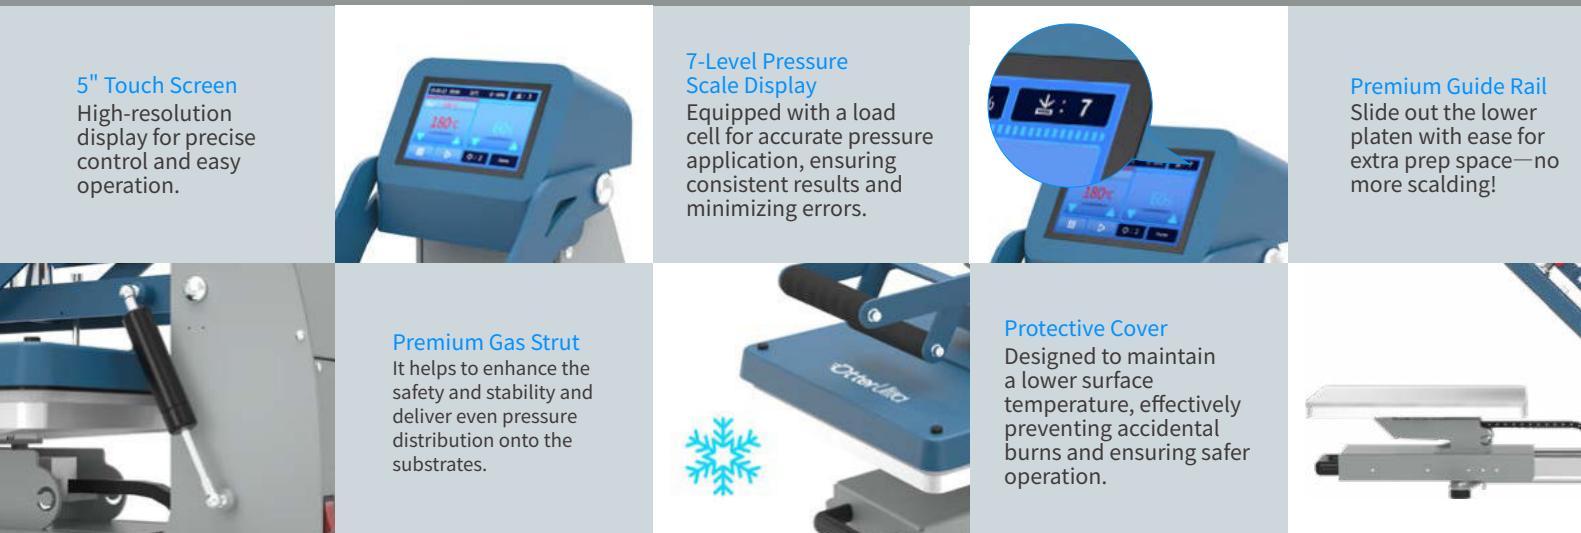

## Safety System



### High-Voltage Test Before Leaving the Factory



### Emergency Stop Switch

Lifts the heating platen immediately in case of emergencies



### Self-Diagnostic Program

Quickly identifies faulty components



### Platinum RTD Temperature Control

More sensitive and precise



### Solid-State Relay

Safe and stable operation



### 12V Low-Voltage Electromagnet

Enhanced safety



### Overload Protector

Prevents short circuits




### Automatic Heat Control Mechanism

Protects the machine from excessive heat



### Auto-Sleep Mode

Automatically stops heating after one hour of inactivity

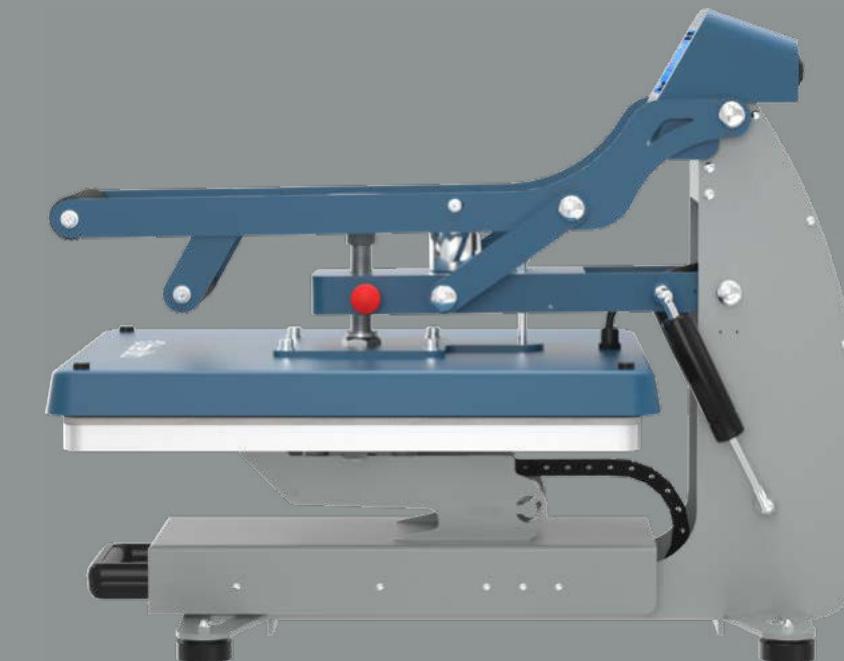

Item No.	OU-G14050MB	Time Range	0-999 seconds	Dimension	74.8*43.14*56.9cm / 29.4*16.9*22.4in
Heat Platen	40x50cm / 16x20in	Pressure Level	Level 0-7	Warranty	Framework - 2 Years Heating Platen - 1 Year Circuit Board - 3 Years
Power	1750W MAX -3%	Net Weight	56.7 KG / 125 lb		
Voltage	240V / 120V 50~60Hz	Temp. Range	0-220°C (32-428 °F)		



## Clamshell Heat Press P9 Series



OT-P93838LB  
38\*38cm

OT-P94050LB  
40\*50cm



OT-P94060LB  
Horizontal Model  
40\*60cm

OT-P94060SLB  
Vertical Model  
40\*60cm

This platen size is ideal for garment decoration, including DTF, heat transfer vinyl, and sublimation, achieving perfect transfer results in minutes!



### Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



### Safety

Overload Protection  
Overheat Protection  
Protective Relay




### Convenient

Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing



### Auto-Open

✓ Slide-Out Drawer  
✓ Auto-Open

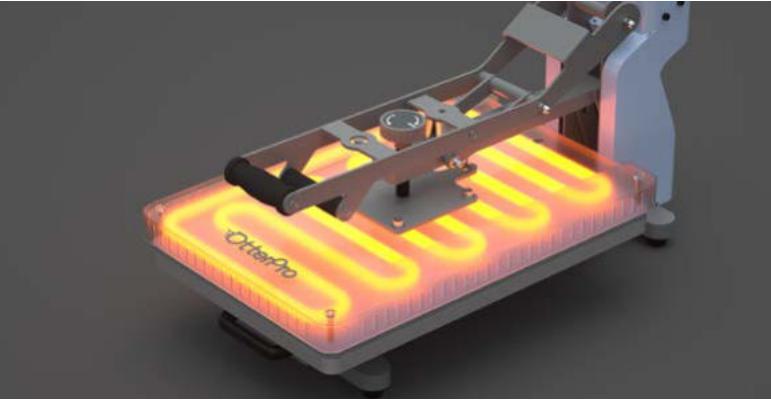


### Premium Heating Element

Heat Platen	38x38cm 15x15in		40x50cm 16x20in		40x60cm 16x24in		Frequency	Parameter
Voltage	220V	110V	220V	110V	220V	110V	50~60Hz	Temp. Range: 32-482 °F (0-250 °C) Time Range: 0-999 seconds
Power	2000w	1300w	2200w	1600w	2400w	1800w		

## Clamshell Heat Press

Specially designed for DTF printing! Unlike the previous horizontal version, this 40x50cm/16x20inch vertical heating platen design is more suitable for garment printing. The uniformly heating platen ensures exceptional printing results every time, making it an excellent choice for a DTF heat transfer!

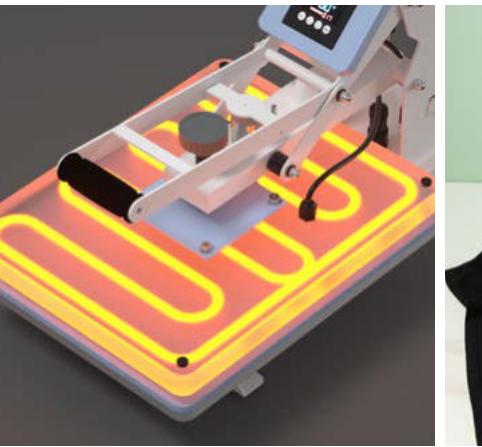

### Premium Heating Element

The Heat Press features an even heating platen board, which is essential for ensuring consistent results when heat transfers onto your substrates.

### Vertical Heating Platen

Ideal for T-shirt printing

Item No.	OT-PB383MDLB	OT-PB4050SMDLB	OT-PB4060MDLB
Heat Platen	38x38cm / 15x15in	40x50cm / 16x20in	40x60cm / 16x24in
Power	2000W / 1300W MAX±5%	2200W / 1600W MAX±5%	2400W / 1800W MAX±5%
Voltage	220V / 110V 50~60Hz		
Temp. Range	0-250°C (0-482 °F)		
Time Range	0-999 seconds		

### Optional Configurations

#### Manual

- ✗ Slide-Out Drawer
- ✗ Auto-Open

#### Drawer

- ✓ Slide-Out Drawer
- ✗ Auto-Open


#### Auto-Open

- ✓ Slide-Out Drawer
- ✓ Auto-Open

Item No.	OT-DSPB4050LB
Heat Platen	40x50cm / 16x20in
Power	2200W / 1600W MAX±5%
Voltage	220V / 110V 50~60Hz
Temp. Range	0-250°C (0-482 °F)
Time Range	0-999 seconds



Smooth Sliding Design

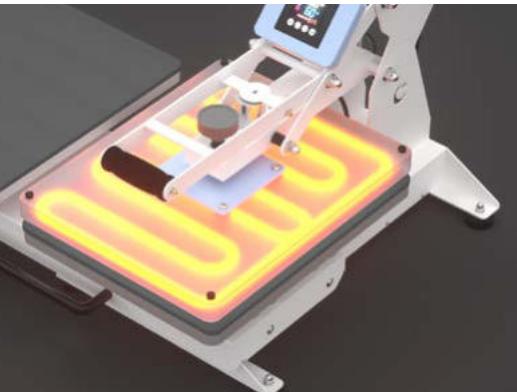

Premium Heating Element

## Semi-Automatic Double Station Heat Press Machine



Double the efficiency of your DTF heat transfer projects with our dual-station design. Now, you can do the prep work while printing, saving both time and effort!



### High Efficiency

Dual Station  
Smooth Sliding Design



### Safety

Overload Protection  
Overheat Protection  
Protective Relay



### Premium Construction


Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



### Convenient

Ease of Use  
Ideal for T-shirt Printing

# DTG Curing Heat Press

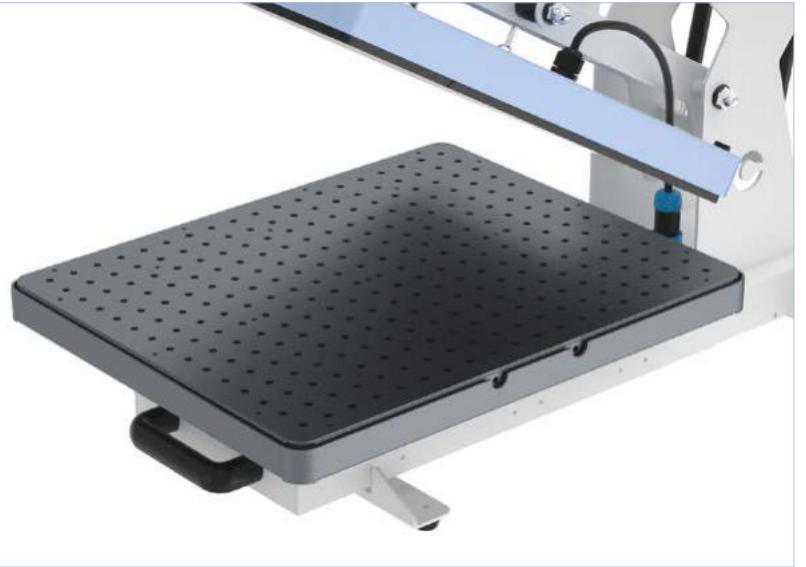

## Lower Platen with Drainage Holes

Easy drainage and storage

Item No.	OT-PBD4050
Heat Platen	40x50cm / 16x20in
Power	2200W / 1600W MAX±5%
Voltage	220V / 110V 50~60Hz
Temp. Range	0-250°C (0-482 °F)
Time Range	0-999 seconds



### Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



### Safety

Built-in Cooling System  
Overload Protection  
Overheat Protection  
Protective Relay



## Vertical Heating Platen

Ideal for T-shirt printing

# Top & Bottom Heat Dual Control Heat Press



This heat press is a 2-in-1 solution, expertly designed for efficient heat transfer and securing 3D puff effects onto textile. It has two independent temperature controls for both the upper and lower heating platen, ensuring consistent, even heat distribution on both sides for flawless results.



## Dual Temp. Control, Dual-sided Heating

Item No.	OT-PBS4050
Heat Platen	40x50cm / 16x20in
Voltage	220V, 50~60Hz
Power(MAX±5%)	4400W
Max. Input Current	20A
Temp. Range	0-250°C (0-482 °F)
Time Range	0-999 seconds



### Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



### Safety

Built-in Cooling System  
Overload Protection  
Overheat Protection  
Protective Relay



## Vertical Heating Platen

Ideal for T-shirt printing

# Autopress Max Heat Press




**Single Platen**

Item No.	OT-AUPB3838FLB OT-DAUPB3838LB (Dual Station)
Power	1200W
Voltage	230V/120V 50~60Hz
Temp. Range	40-205° C(104-401° F)
Time Range	1-999 seconds
Printable Articles Max	38x38cm / 15x15in



**Dual Platen**



## One Touch Mode

Just touch to repeat! Batch personalization has never been simpler with a single touch.



## Smooth Sliding Design

The guide rail design helps to enhance workflow efficiency and ensure a smooth and unobstructed movement.



## Retracting Drawer

Effortless and elegant handle design that saves space; the retracting drawer offers you more room for easy prep work.



## Intelligent Pressure

For substrates up to 2 cm thick, perfectly consistent pressure every time, with no guesswork.



## Premium Heating Element

Redesigned for unmatched efficiency and even heating with 15" x 15" heating platen.



## Unmatched Clarity and Convenience

Discover the ease of an expanded screen for effortless navigation, visualization, and settings adjustment. Create more with a timer that extends up to 8 minutes for larger projects.



## Go Handleless

It's designed with an integrated handle, giving it a compact and more streamlined look.

# Lanyard Heat Press

Designed specifically for lanyard personalization, this heat press series features an extra-wide heating platen—perfect for full-wrap, full-color printing on lanyards, ribbons, shoelaces, and more. Ideal for branding, trade shows, events, schools, and promotional products.




OT-PBAS25100DLB

Dual heating with feeding device for faster, consistent results on both sides.



Lanyard Feeding Device



Double-sided Printable



Designed for Lanyard

Heating Platen: 100 x 25 cm / 39.3 x 9.8 in  
Dimension: 204 x 84 x 63 cm / 80.3 x 33 x 24.8 in



OT-PBA25100DLB

Compact and efficient entry-level model for basic lanyard printing needs.

Heating Platen: 100 x 25 cm / 39.3 x 9.8 in  
Dimension: 105 x 80 x 63 cm / 41.3 x 31.4 x 24.8 in



Designed for Lanyard

Can be used with a stand  
\*Stand sold separately

Size	Power	Voltage	Max. Input Current
25x100cm / 9.8x39.3in	2400W	220V/Single Phase	10.91A
25x100cm / 9.8x39.3in (Upper & Lower Heat)	4800W	220V/Single Phase	21.82A
Frequency: 50Hz	Temp. Range: 0-250°C (32-482 °F)	Time Range: 1-999 seconds	



OT-PBAD25100DLB

Enhanced with a feeding device to streamline workflow and reduce handling time.




Lanyard Feeding Device



Designed for Lanyard


Heating Platen: 100 x 25 cm / 39.3 x 9.8 in  
Dimension: 204 x 84 x 63 cm / 80.3 x 33 x 24.8 in



## Double-sided Printable

Featuring upper and lower platen, you can achieve double-sided printing effect at once.


Optional Configurations

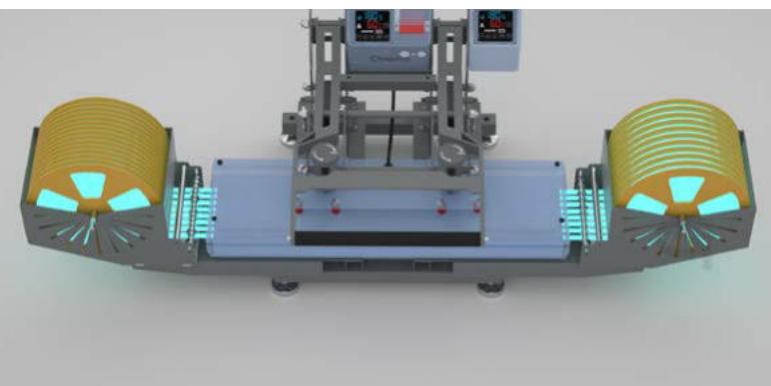

## Highly Efficient Feeding Device


The all-in-one heat press combines feeding and winding, allowing you to print multiple lanyards simultaneously. Its even heating design boosts productivity and efficiency for all your projects.

Optional Configurations

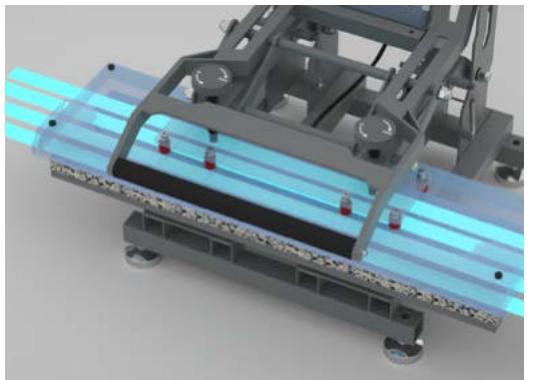

## Designed for Lanyard

The large-format design delivers high-efficiency personalization for lanyards, accommodating most standard sizes on the market.

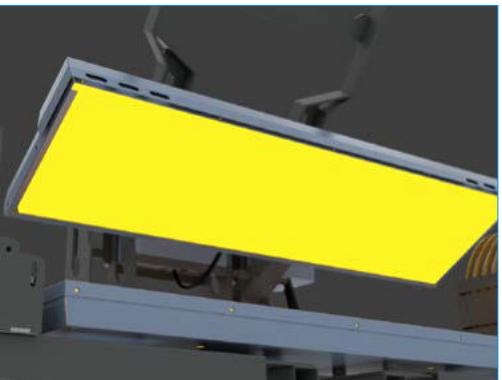

## Even Heating

Premium heating element for flawless results every time.



## User-friendly Touch-screen

Designed with a large touch-screen design for precise temperature control.



# Swing Away Heat Press



Sway-away to place, swing back to press! This design helps you avoid scalding and injuries during prep work. With its high-pressure eccentric bearing, you can achieve even heat distribution across your substrates for flawless results every time!



## Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging




## Safety

Built-in Cooling System  
Overload Protection  
Overheat Protection  
Protective Relay




## Convenient


Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing

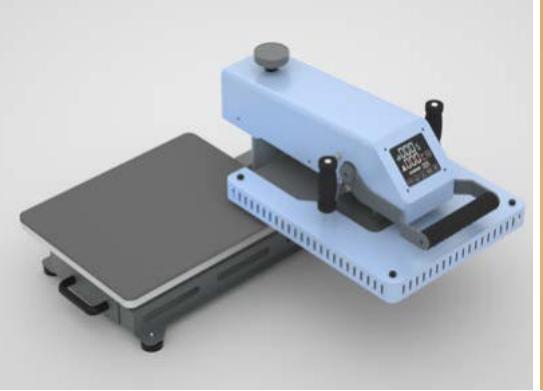

Swing-away Design

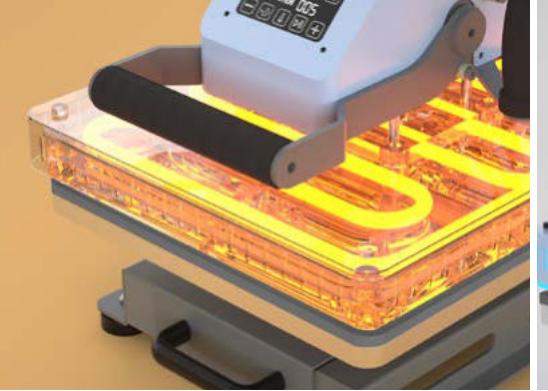

Premium Heating Element

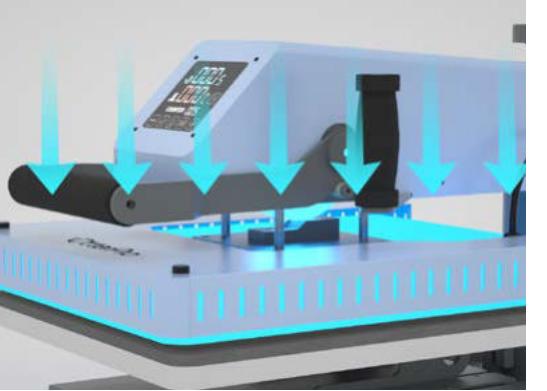

High Pressure Eccentric Bearing

# Air Press Swing Away Heat Press



Featuring two handles, this heat press ensures safe and convenient control of the upper plate. The front-facing control panel allows for easy parameter adjustment from a comfortable, natural posture. Powered by an air compressor, it effortlessly raises and lowers the platen for a smooth, efficient operation.



## Convenient

Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing



## Safety

Built-in Cooling System  
Overload Protection  
Overheat Protection  
Protective Relay



## Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



## High Efficiency

Air-operated  
Auto Press & Release


Item No.	Heat Platen	Power(MAX±5%)/ Voltage	Frequency	Temp. Range	Time Range
OT-QSYT4050LB	40x50cm 16x20in	2200W / 220V 1600W / 110V	50~60Hz	0-250°C 32-482 °F	0-99 s



Vertical Heating Platen



Premium Heating Element

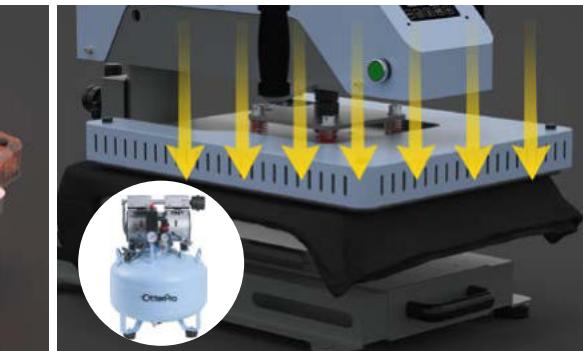


Automatic Pneumatic System


## Air Press Dual Station Swing-away Heat Press




\*Air Compressor Sold Separately

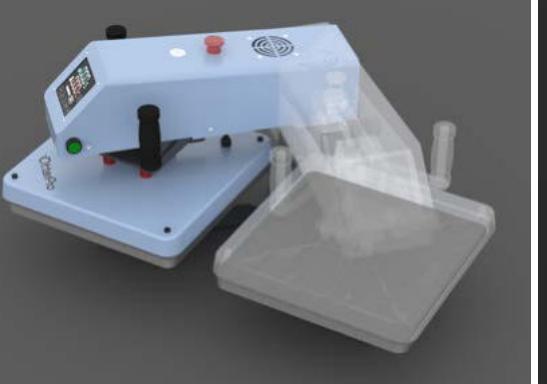

Swing-away Design

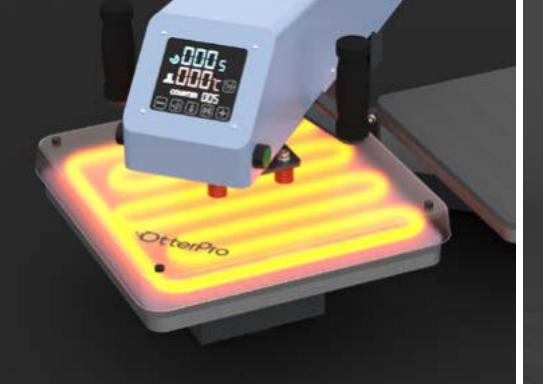

Premium Heating Element

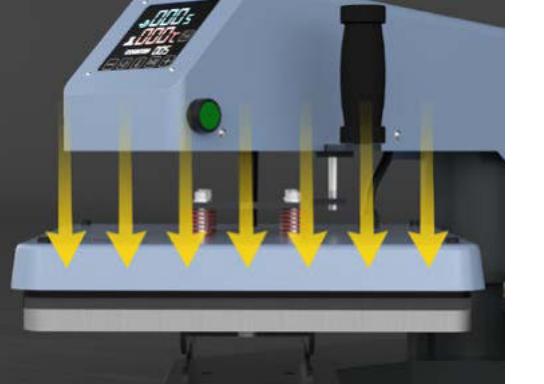

Automatic Pneumatic System

Sway-away Heat Press P15 Series

This air-operated heat press uses air pressure to apply consistent, uniform heat and pressure to your substrates. With its swing-away and double-station designs, you can prepare your next project while one is being printed, saving you time and effort!

### High Efficiency

Dual Station  
Swing-away Design  
Air-operated  
Auto Press & Release

### Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging

### Safety

Built-in Cooling System  
Overload Protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation

### Convenient

Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing

Item No.	Heat Platen	Power(MAX±5%)/ Voltage	Frequency	Temp. Range	Time Range
OT-DQSPBY3838LB	38x38cm 15x15in	2000W / 220V 1300W / 110V	50~60Hz	0-250°C 32-482 °F	0-999 s

Sway-away Heat Press P15 Series


## Air Press Swing Dual Station Heat Press




\*Air Compressor Sold Separately



Swing-away Design

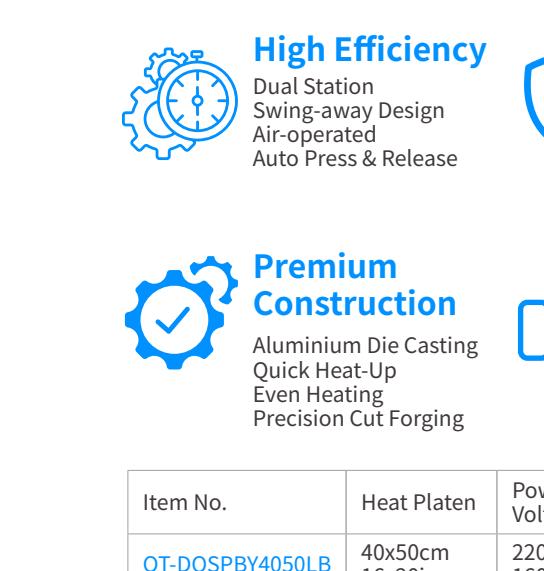

Premium Heating Element

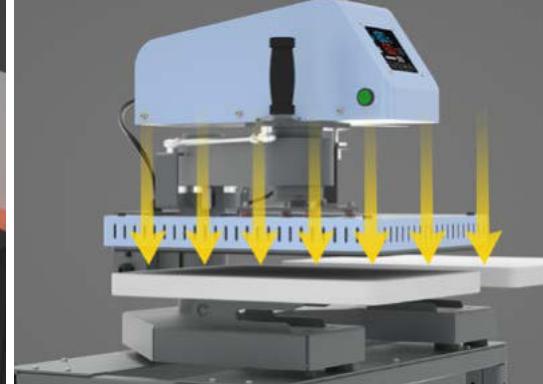

Automatic Pneumatic System

With an air-powered design and dual-station capability, this heat press boosts efficiency and success rates in garment decoration. Its front-facing control panel allows for quick and easy parameter adjustments.

### High Efficiency

Dual Station  
Swing-away Design  
Air-operated  
Auto Press & Release

### Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging

### Safety

Built-in Cooling System  
Overload Protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation

### Convenient

Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing

Item No.	Heat Platen	Power(MAX±5%)/ Voltage	Frequency	Temp. Range	Time Range
OT-DQSPBY4050LB	40x50cm 16x20in	2200W / 220V 1600W / 110V	50~60Hz	0-250°C 32-482 °F	0-999 s


# Air Press Slide Dual Station Combo Heat Press

Powered by an air compressor, this pneumatic heat press combines a compact, dual-station design with double the efficiency and productivity. It delivers even heat and pressure for flawless results—achieving a 99% success rate with our air-operated series! The heating attachment is replaceable, combines a heat press to suit your need.




**Double Station Label Maker**  
OT-QSHYB1515LB

Power	Voltage	Temp. Range	Time Range
550W MAX±5%	220V / 110V 50~60Hz	0-250°C (32-482 °F)	0-999 seconds

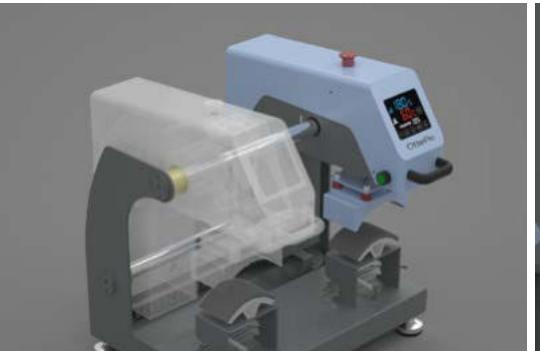

**Smooth Sliding Design**

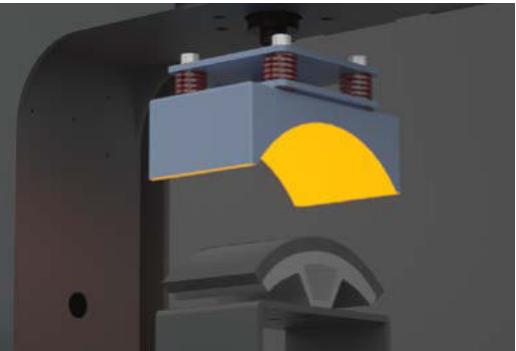

**Premium Heating Element**



## High Efficiency

Dual Station  
Smooth Sliding Design  
Air-operated  
Auto Press & Release  
Built-in Cooling System  
Overload protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation



## Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging  
Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing



## Safety

Built-in Cooling System  
Overload protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation

## Sliding Heat Press P16 Series

## Sliding Heat Press P16 Series

# Air Press Slide Dual Station Flat Heat Press



\*Air Compressor Sold Separately

Maximize your heat transfer productivity and efficiency with this air-operated heat press! Slide, press, and repeat—batch personalization has never been easier!



## High Efficiency

Dual Station  
Smooth Sliding Design  
Air-operated  
Auto Press & Release  
Built-in Cooling System  
Overload protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation



## Safety

Built-in Cooling System  
Overload protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation



## Premium Construction


Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging  
Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing



## Convenient

Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing


Item No.	OT-QSH4050LBN	Voltage	220V / 110V 50~60Hz
Heat Platen	40x50cm / 16x20in	Temp. Range	0-250°C (32-482 °F)
Power	2200W /1600W MAX±5%	Time Range	0-999 seconds

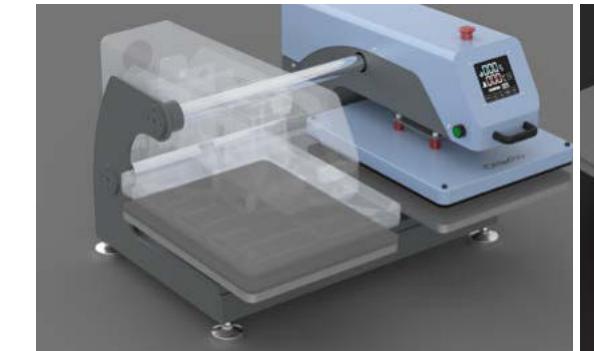

**Smooth Sliding Design**



**Premium Heating Element**

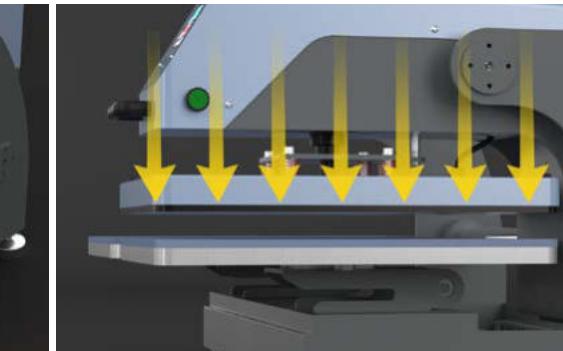

**Automatic Pneumatic System**



## Single Station Heat Press Stand

BHP472711D



## Air Compressor 30L

Item No.	OT-KYJ30LB
Capacity	30L
Power	550W
Voltage	220V / 110V 50~60Hz
Max. Pressure	0.8mpa
Air Flow Capacity	100L/min



## Dual Station Lift Heat Press Stand

BHP666900S



## OtterPro Ink Shaker

Skip the manual shaking! It helps evenly shake DTF ink to avoid precipitation and gives your printheads a longer service life.



## VISIT US

for new releases and tutorials on our website.

[WWW.OTTERDTF.COM](http://WWW.OTTERDTF.COM)

FOLLOW US FOR THE LATEST UPDATES!

